

规格书

SPECIFICATION

丽智电子（南通）有限公司

地址：江苏省南通市通州区康富路 789 号

Address: No. 789, Kang Fu Road Tongzhou District Nantong city Jiangsu province

Tel: 0086-0513-68856666

Fax: 0086-0513-68383688

抗浪涌厚膜贴片电阻规格书- RS 系列

Approval Specification for Anti-Surge Thick Film Chip Resistors-Type **RS**

1. 范围 (scope) :

1.1 适用于本公司所生产的无铅、抗浪涌厚膜贴片电阻 RS 系列

This specification applies to Anti-Surge Thick Film Chip Resistors which meet requirements of Pb free.

1.2 本公司的无铅产品指的贴片电阻端电极无铅，而存在于电阻层的玻璃中的符合 RoHS 豁免条款。

There no lead exists in terminal of resistor, and lead which exist in glass of resistor layer meets RoHS exemption.

1.3 符合 AEC-Q200 條款

The relevant provisions of the AEC-Q200

2. 产品料号 (part number) :

0603 1/4W 5% 100 Ω


RS0603J40101G

RS	0603	J	4	0101	G	
↓	↓	↓	↓	↓	↓	↓
类型(Type)	尺寸(Size)	公差	额定功率	阻值	包装代码	区别码
RS: 抗浪涌	0402	Tolerance	Rated Power	Resistance value	Packing Code	Distinction Code
厚膜贴片电	0603	F=±1%	A=1/10W	±1%	G=成品, 7 inch reel	空码 = 无指定
阻	0805	G=±2%	8=1/8W	49R9=49.9 Ω	常规包装量	- "X" = 特别指
(Anti-Surge	1206	J=±5%	4=1/4W	1002=10K Ω	H=成品, 10 inch reel	定, 不同字母代表
thick film	1210	K=±10%	N=1/3W	≥ ±2%	两倍包装量	不同指定
chip	2010	M=±20%	E=2/5W	06R8=6.8 Ω	Z=成品, 15K包装量	
resistors)	2512	N=±30%	3=1/2W	0564=560K Ω	S=成品, 20K包装量	
			2=3/4W		U=成品, 50K包装	
			1=1W		V=bulk (散料)	
			D=1.5W			
			B=2W			

抗浪涌厚膜贴片电阻规格书- RS 系列

Approval Specification for Anti-Surge Thick Film Chip Resistors-Type **RS**

3. 电阻本体字码标示 (Marking on the Resistor's Body):

※ 0402 因本体太小，本体上无字码标示 For 0402 size, no marking on the body due to the small size of the resistor. ※ 公差$\geq\pm 2\%$的产品，以三字码标示，前两位表示阻值的有效数字，最后一位表示 10 的乘幂 $\geq\pm 2\%$ Tolerance product: the marking is 3 digits, the first 2 digits are significant figures of resistance value and the 3rd one denotes the power number of 10, (10X). ※ $\pm 1\%$的产品，以四字码标示，前三位表示阻值的有效数字，最后一位表示 10 的乘幂 $\pm 1\%$ tolerance product: the marking is 4 digits, the first 3 digits are significant figures of resistance value and the 4th one denotes the power number of 10, (10X). ※ 0603 $\pm 1\%$ E96 系列的标准阻值，因电阻本体太小，采用三位代码标示。 Standard E96 series values of 0603 $\pm 1\%$: due to the small size of the resistor's body, use 3digits code to indicate the resistance value.		No Marking
		$472=47\times 10^2=4.7K\Omega$
		10 Ω 以下标示：5R6=5.6 Ω Below 10 Ω : 5R6=5.6 Ω
		$4992=499\times 10^2=49.9K\Omega$
		100 Ω 以下标示：6R81=6.81 Ω Below 100 Ω : 6R81=6.81 Ω
		0603 $\pm 1\%$ E96 系列 $38Y=243\times 10^{-2}=2.43\Omega$

抗浪涌厚膜贴片电阻规格书- RS 系列

Approval Specification for Anti-Surge Thick Film Chip Resistors-Type **RS**

0603 $\pm 1\%$ E96 系列的标准阻值代码(Standard E96 Series Resistance Value Code for 0603 $\pm 1\%$ Marking)

代码 Code	阻值 Value	代码 Code	阻值 Value	代码 Code	阻值 Value	代码 Code	阻值 Value	代码 Code	阻值 Value	代码 Code	阻值 Value
01	100	17	147	33	215	49	316	65	464	81	681
02	102	18	150	34	221	50	324	66	475	82	698
03	105	19	154	35	226	51	332	67	487	83	715
04	107	20	158	36	232	52	340	68	499	84	732
05	110	21	162	37	237	53	348	69	511	85	750
06	113	22	165	38	243	54	357	70	523	86	768
07	115	23	169	39	249	55	365	71	536	87	787
08	118	24	174	40	255	56	374	72	549	88	806
09	121	25	178	41	261	57	383	73	562	89	825
10	124	26	182	42	267	58	392	74	576	90	845
11	127	27	187	43	274	59	402	75	590	91	866
12	130	28	191	44	280	60	412	76	604	92	887
13	133	29	196	45	287	61	422	77	619	93	909
14	137	30	200	46	294	62	432	78	634	94	931
15	140	31	205	47	301	63	442	79	649	95	953
16	143	32	210	48	309	64	453	80	665	96	976

0603 $\pm 1\%$ E96 系列的指数代码(Multiplier Code for 0603 $\pm 1\%$ Marking)

代码 Code	Y	X	A	B	C	D	E	F
指数 Multiplier	10^{-2}	10^{-1}	10^0	10^1	10^2	10^3	10^4	10^5

阻值标示如下(So the resistance value are marked as the following examples)



$$10D = 124 \times 10^3 = 124K \Omega$$



$$38Y = 243 \times 10^{-2} = 2.43 \Omega$$

0603 $\pm 1\%$ 的产品，在标准 E24 系列中，但不属于 E96 系列，标示与 5% 的字码相同，但是在字码下加一条线
 Standard E24 and not belong to E96 series values of 0603 $\pm 1\%$, the marking is the same as 5% tolerance but marking as underline



$$\underline{33}1 = 33 \times 10^1 = 330 \Omega$$




$$\underline{56}0 = 56 \times 10^0 = 56 \Omega$$

抗浪涌厚膜贴片电阻规格书- RS 系列


Approval Specification for Anti-Surge Thick Film Chip Resistors-Type **RS**

4. 尺寸 (dimension) :

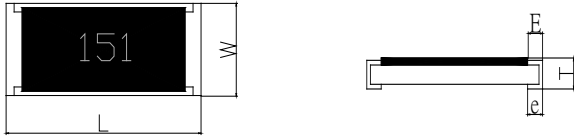尺寸 dimension					
	单位 (unit) : mm				
型别 (Type)	L	W	T	E	e
RS0402	1.00±0.05	0.50±0.05	0.30±0.05	0.15±0.10	0.20±0.10
RS0603	1.60±0.10	0.80±0.10	0.40±0.10	0.30±0.20	0.30±0.10
RS0805	2.00±0.10	1.25±0.10	0.50±0.15	0.30±0.15	0.40±0.15
RS1206	3.05±0.10	1.60±0.10	0.55±0.15	0.40±0.20	0.50±0.20
RS1210	3.05±0.10	2.50±0.15	0.55±0.15	0.50±0.20	0.50±0.20
RS2010	5.00±0.20	2.50±0.15	0.55±0.10	0.60±0.20	0.60±0.20
RS2512	6.30±0.20	3.20±0.15	0.68±0.10	0.60±0.20	0.60±0.20

5. 特性参数 (Performance Characteristics)


5.1 功率衰减曲线 (Derating Curve) :

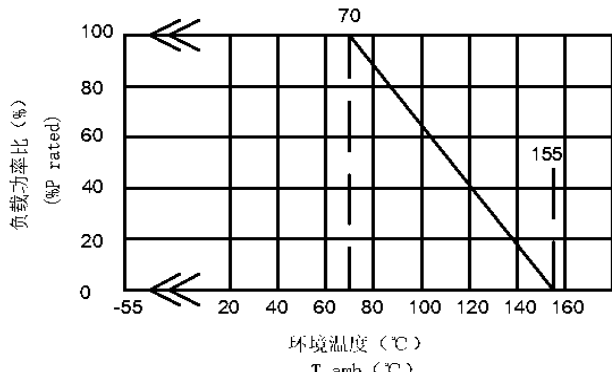使用温度范围	-55℃~+155℃
说明 Directions	电阻的额定功率基于-55℃至 70℃的环境温度下运行。当温度超过 70℃时，负载功率比例依照下图予以修订。 Resistors shall have a power rating based on continuous load operation at an ambient temperature from -55℃ to 70℃. For temperature in excess of 70℃, the load shall be derated as shown in figure.
功率衰减曲线 Derating Curve	 负载功率比 (%P rated) 环境温度 (℃) T amb (℃)

抗浪涌厚膜贴片电阻规格书- RS 系列


Approval Specification for Anti-Surge Thick Film Chip Resistors-Type **RS**

5.2 端子温度曲线 (Terminal part Temperature Curve) :

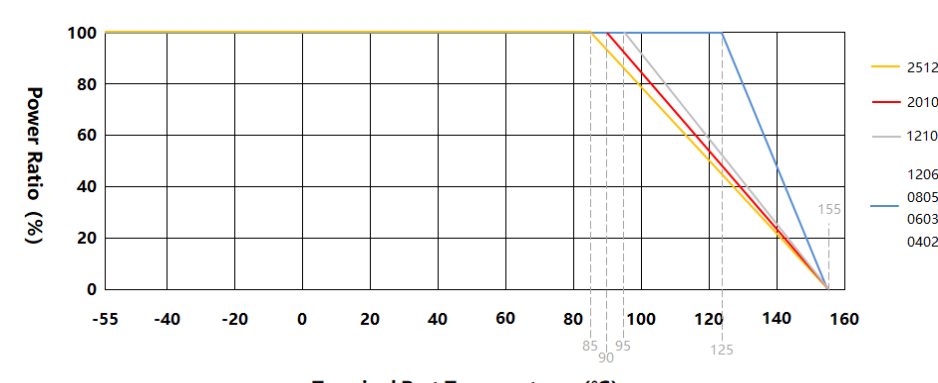说明 Directions	电阻在使用时，端子温度达到对应尺寸的温度时，功率需按照图上降额曲线修正。 For resistors operated terminal part temperature of described for each size or above, a power rating shall be derated in accordance with derating curve.
端子温度曲线 Terminal part Temperature Curve	 The graph shows the Power Ratio (%) on the Y-axis (0 to 100) versus Terminal Part Temperature (°C) on the X-axis (-55 to 160). Derating curves are provided for various resistor sizes: 2512 (yellow), 2010 (red), 1210 (grey), 1206 (light blue), 0805 (dark blue), 0603 (light blue), and 0402 (dark blue). The curves show that power rating decreases as temperature increases, starting from a base temperature (e.g., 85°C for 2512, 125°C for 0402) and reaching 0% at 155°C.


5.3 雷电浪涌曲线 (Lightning Surge Curve) :

1.2/50us Lightning Surge

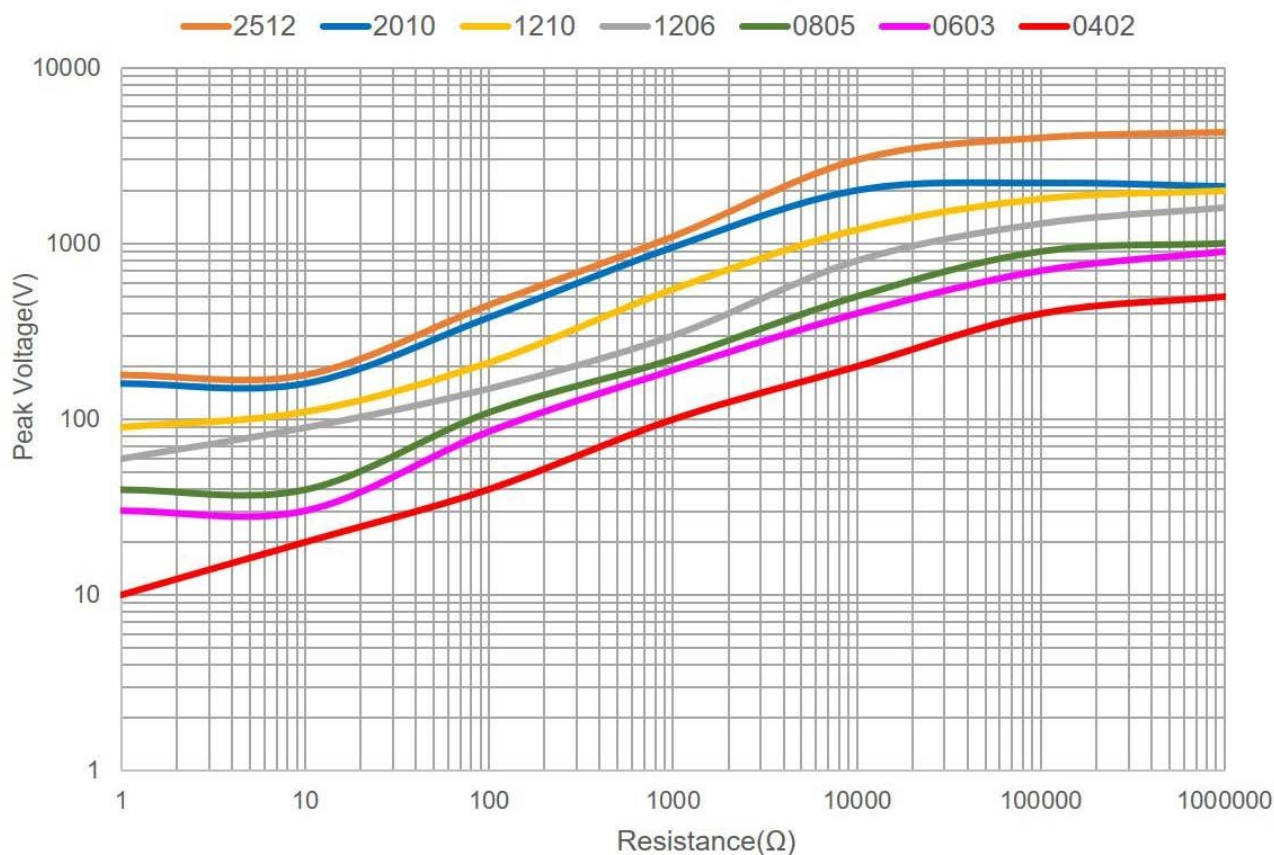


抗浪涌厚膜贴片电阻规格书- RS 系列

Approval Specification for Anti-Surge Thick Film Chip Resistors-Type **RS**

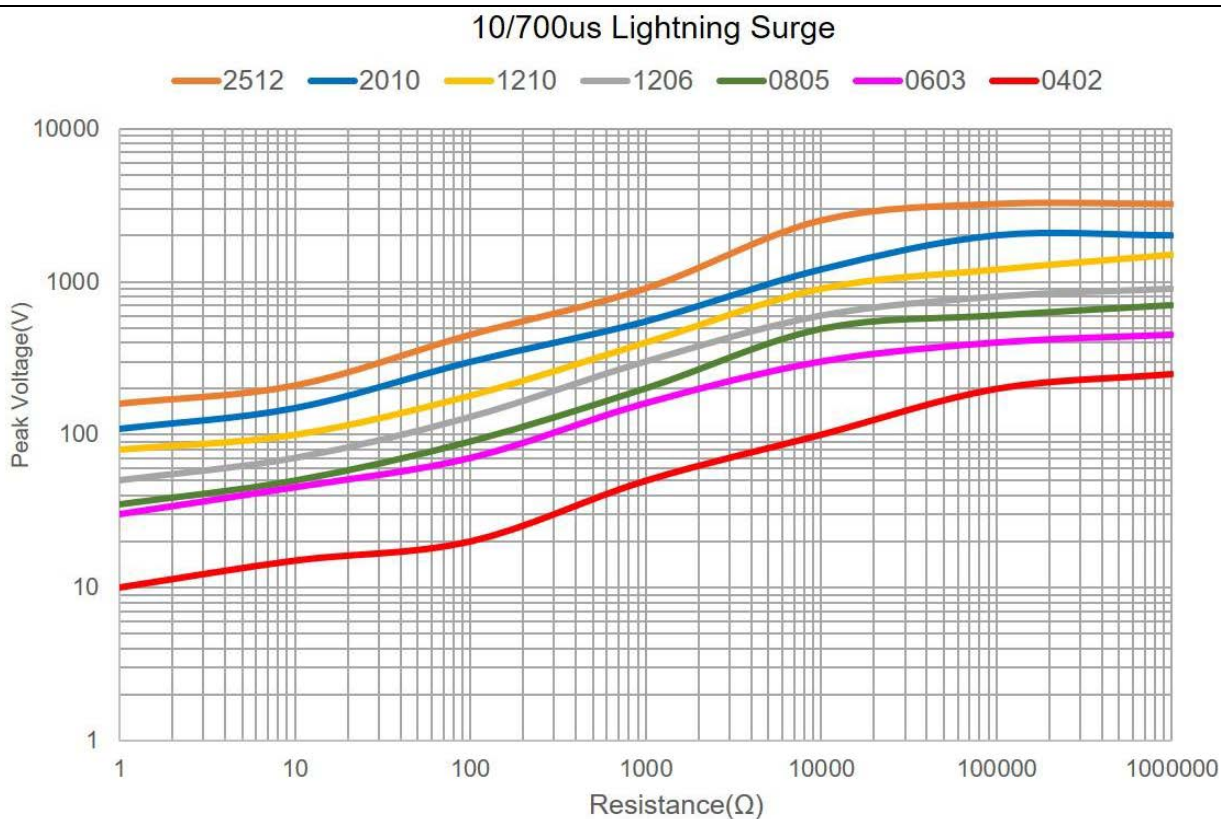


5.4 单脉冲功率曲线 (Single Pulse Power Curve) :

Single Pulse 100 ohm 5%

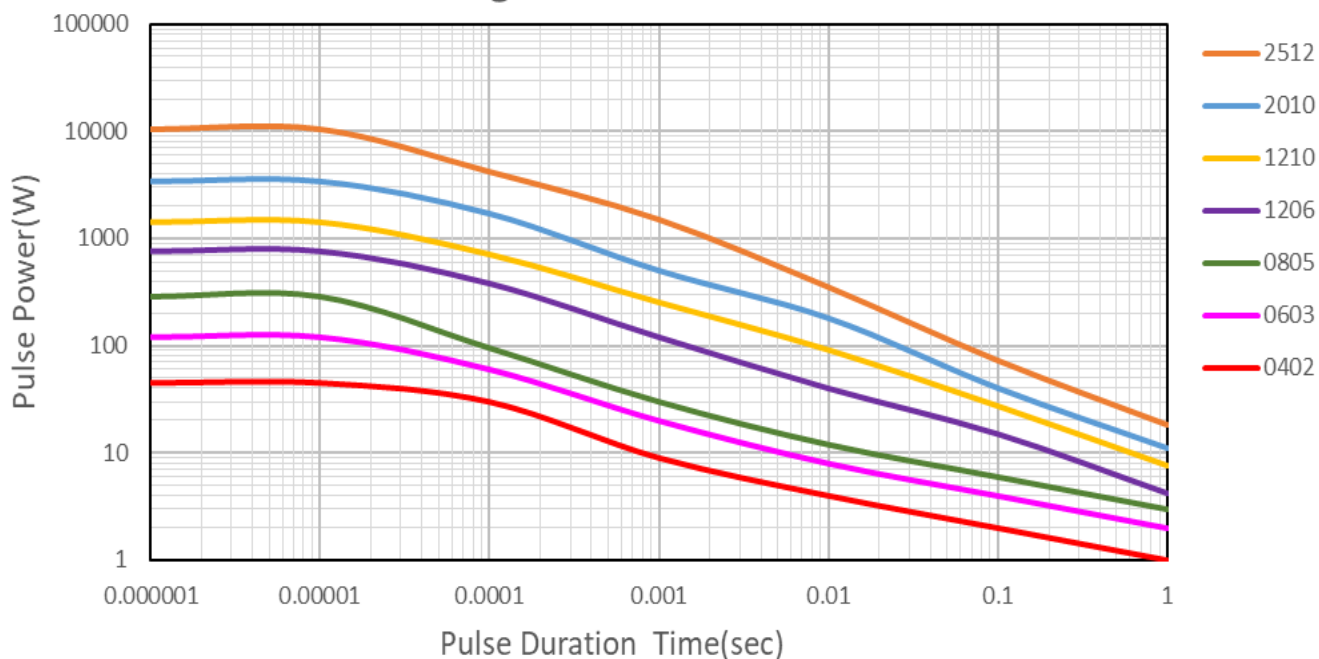


Approval Specification for Anti-Surge Thick Film Chip Resistors-Type **RS**

Single Pulse 100 ohm 1%

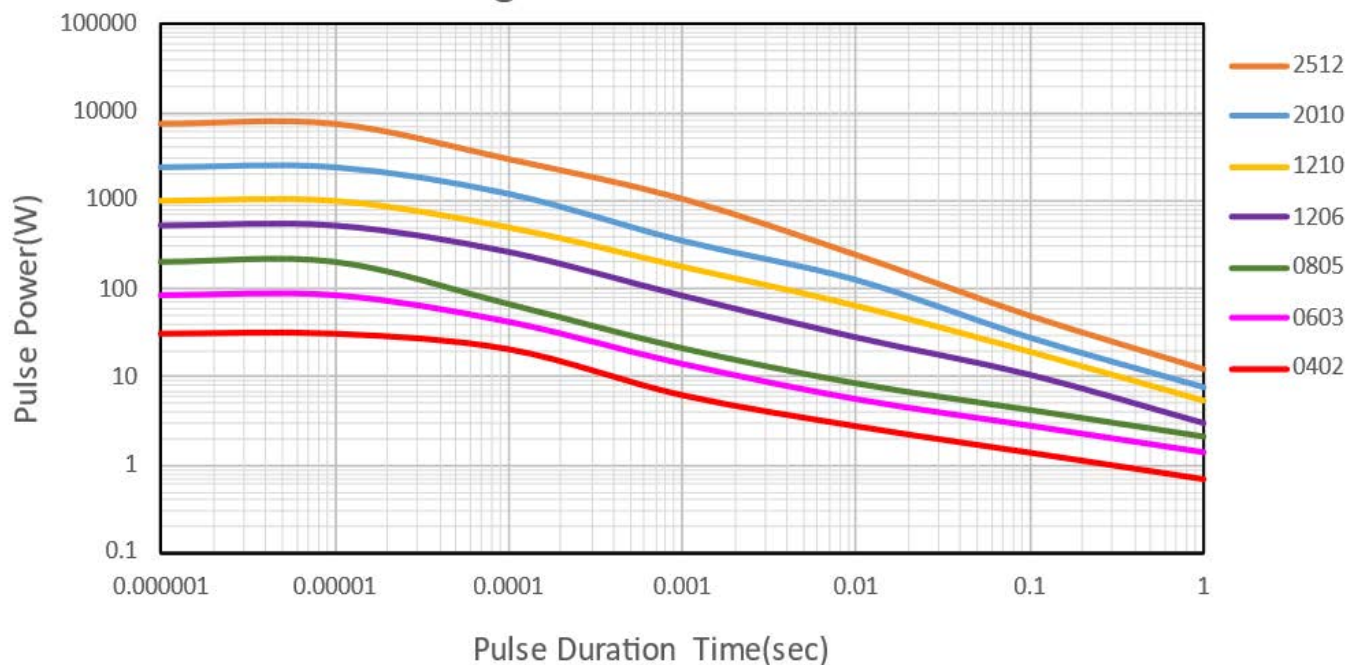


5.5连续脉冲功率曲线（Continuous Pulse Power Curve）：


Continuous Pulse 100 ohm 5%

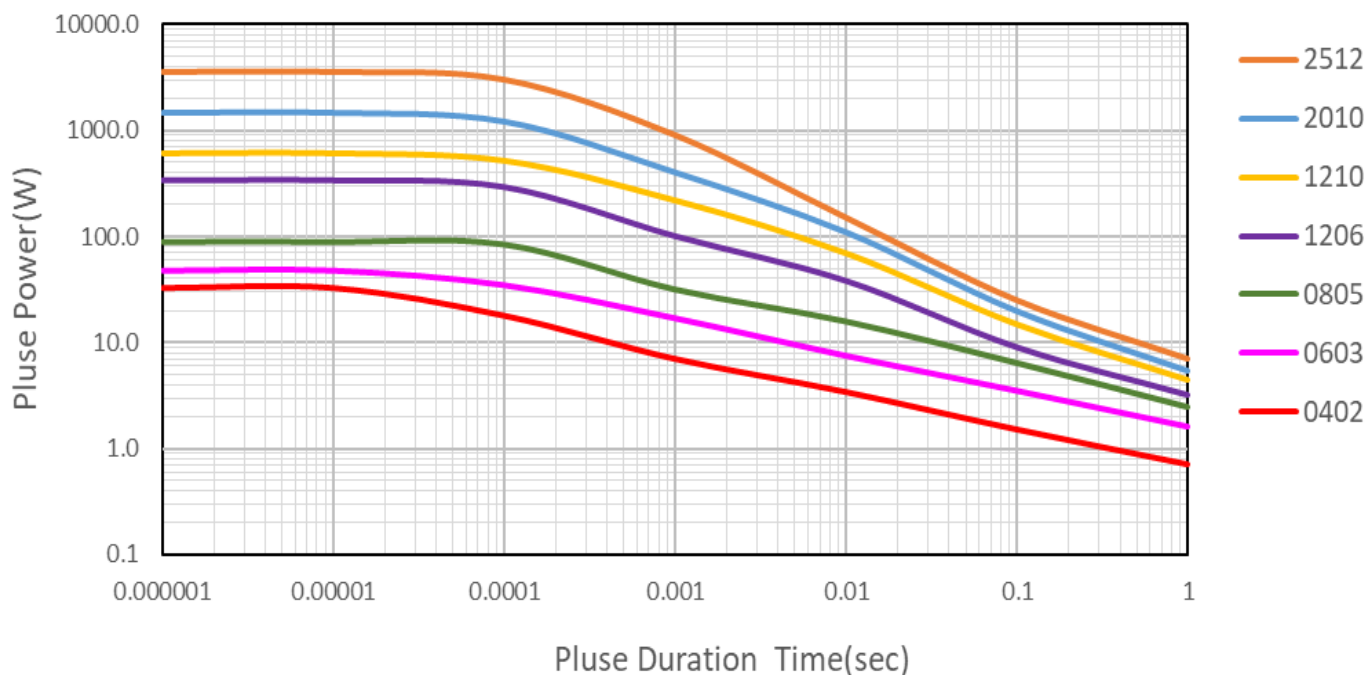


Approval Specification for Anti-Surge Thick Film Chip Resistors-Type **RS**

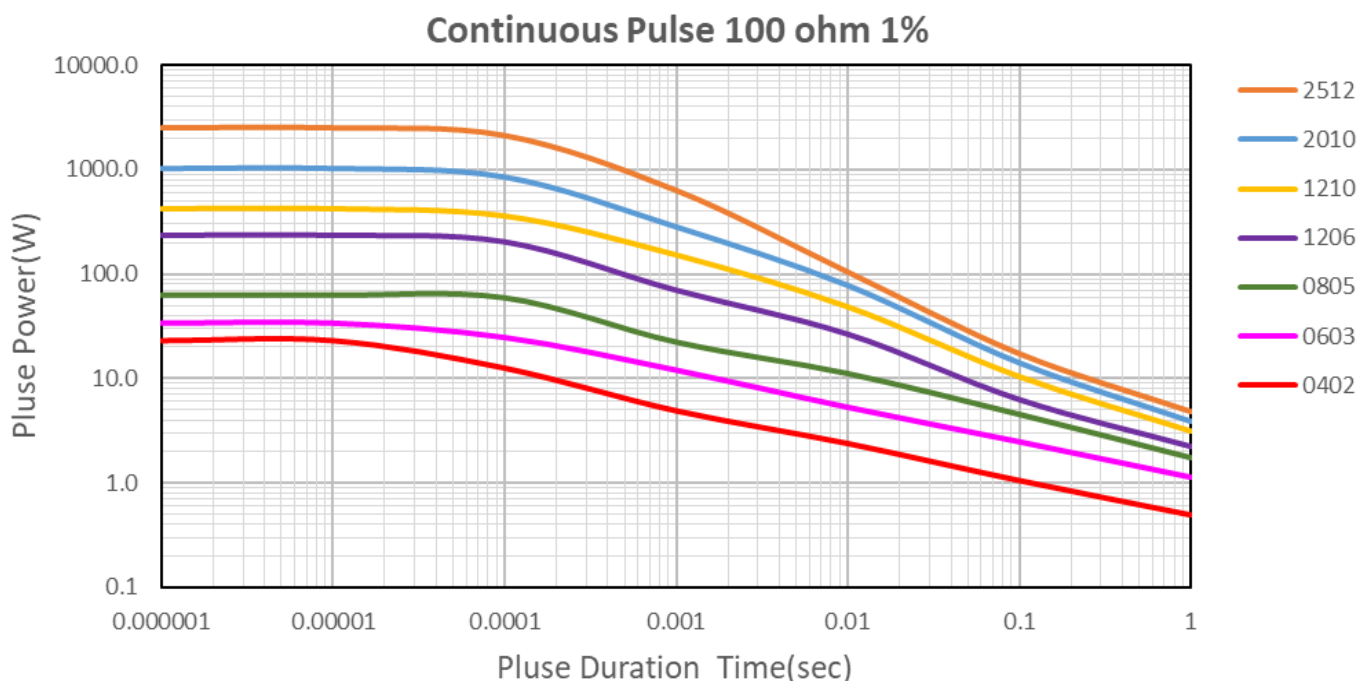

5.6脉冲电压曲线（Pulse Voltage Curve）：

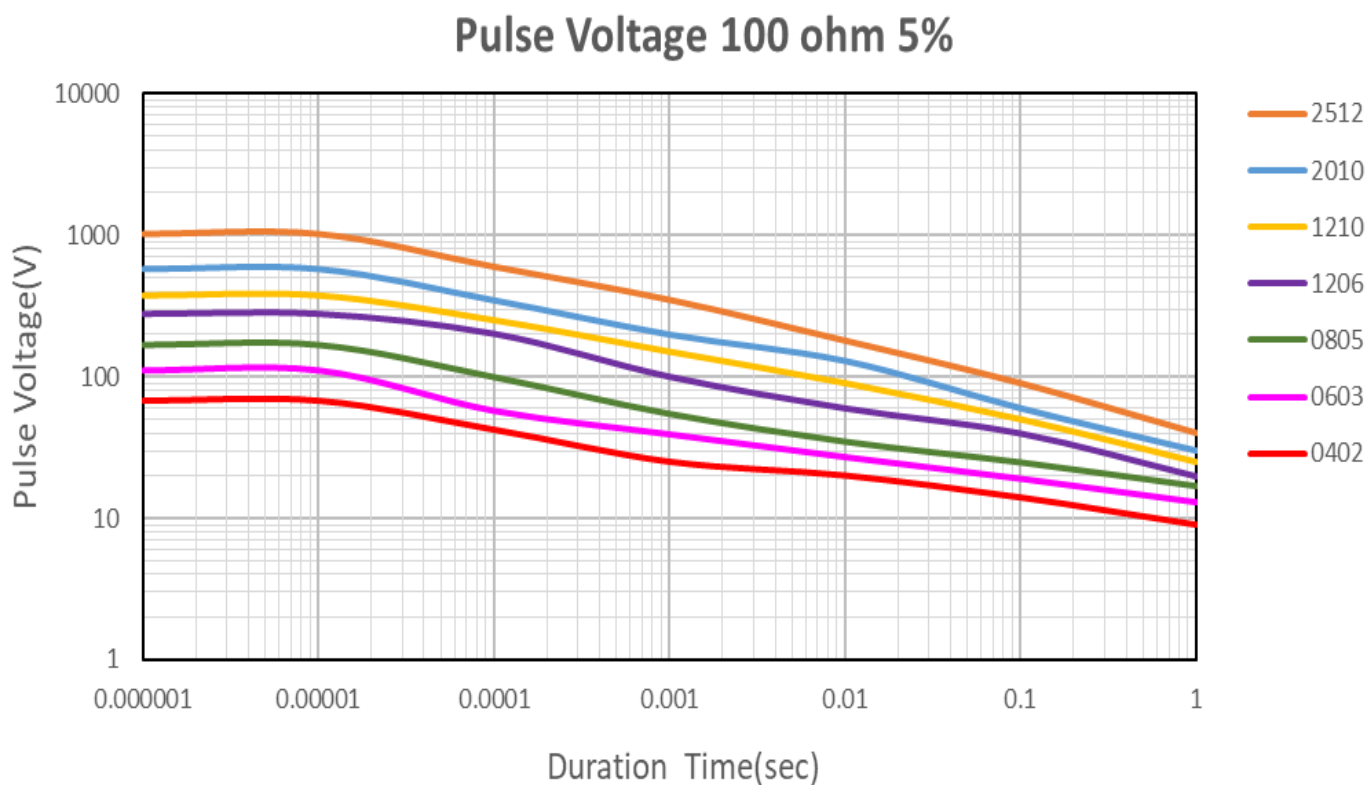

Pulse Voltage 100 ohm 1%

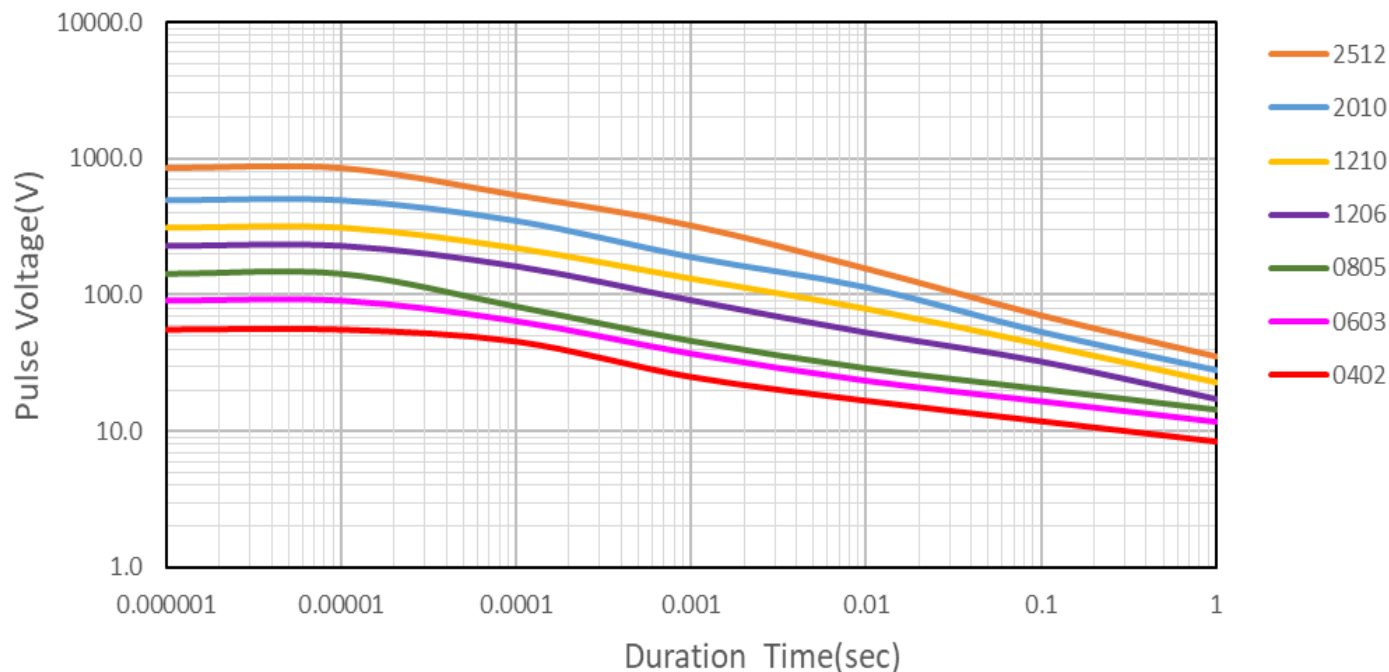

备注 (remark) :

※ 额定电压计算公式 (The rated voltage is calculated by the following formula) :

$R \geq 1\Omega$:

$$E = \sqrt{RP}$$

E : 额定电压 (Rated Voltage) (V)

P : 额定功率 (Rated Power) (W)

R : 电阻阻值 (Resistance) (ohm)


※ 如果计算出的电压超过此型别的最大工作电压, 则此型别的最大工作电压为此电阻的额定电压。

In case the value calculated by the formula exceed the maximum working voltage as above table 9, the maximum working voltage shall be regarded as rated voltage.

储存条件及期限 (storage condition or Data) : $25 \pm 5^\circ\text{C}$, $60 \pm 20\% \text{RH}$; 有效期 2 年。

Approval Specification for Anti-Surge Thick Film Chip Resistors-Type **RS**

6.电阻结构（Construction）：

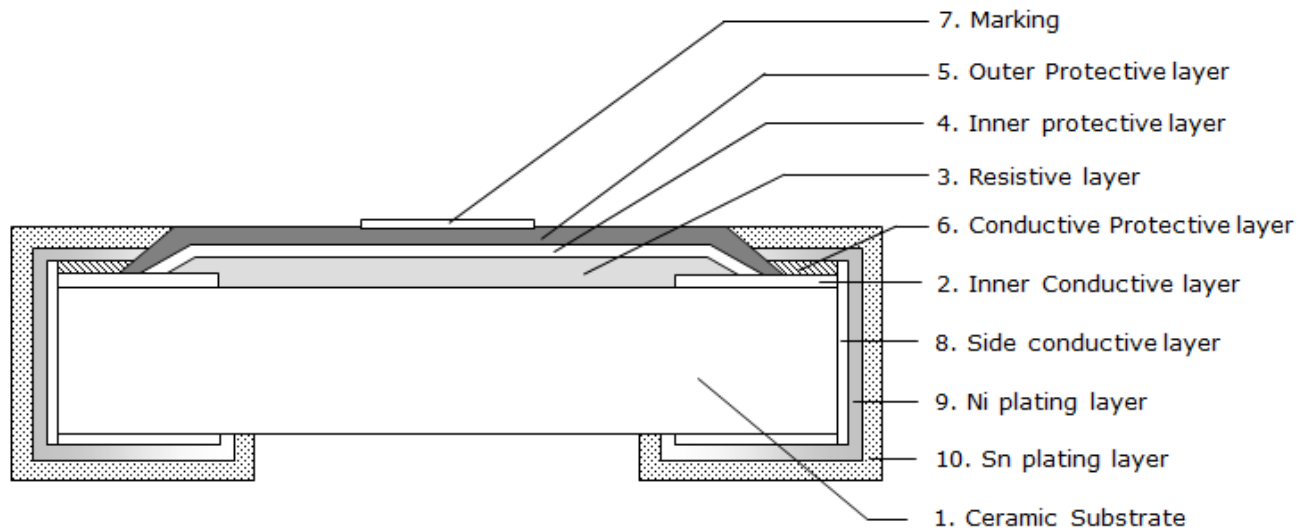

No.	结构 construction	主要材料 Major material
1	陶瓷基板 Ceramic substrate	三氧化二铝 Al ₂ O ₃
2	内电极 Inner Conductive layer	银 Ag-Pd
3	阻体层 Resistive layer	氧化钌+玻璃 RuO ₂ + glass
4	内保护层 Inner protective layer	玻璃 Glass
5	外保护层 Outer Protective layer	环氧树脂 Epoxy
6	电极保护层 Conductive Protective layer	银 Ag
7	文字 Marking	环氧树脂 Epoxy
8	侧电极 Side conductive layer	镍铬合金 Ni-Cr
9	镍电极 Ni plating layer	镍 Ni
10	锡电极 Sn plating layer	雾锡 Matte Tin

抗浪涌厚膜贴片电阻规格书- RS 系列

Approval Specification for Anti-Surge Thick Film Chip Resistors-Type **RS**

7. 电气特性标准 (Standard Electrical Specifications) :

7.1. 规格-1 (Type-1)

型别 Type	额定功率 Rated power	最大工作电压 Max Working Voltage	最大过载电压 Max Overload Voltage	T.C.R. (PPM/°C)	阻值范围		
					F: $\pm 1.0\%$ G: $\pm 2.0\%$	J: $\pm 5.0\%$ K: $\pm 10\%$	M: $\pm 20\%$ N: $\pm 30\%$
RS0402	1/10W	50V	100V	± 400	$1\Omega \leq R < 10\Omega$	$1\Omega \leq R < 10\Omega$	
				± 300	-	$10\Omega \leq R < 1K\Omega$	
				± 200	$10\Omega \leq R \leq 1M\Omega$	$1K\Omega \leq R \leq 10M\Omega$	
RS0603	1/8W	150V	200V	± 400	$1\Omega \leq R < 10\Omega$	$1\Omega \leq R < 10\Omega$	
				± 200	-	-	$10\Omega \leq R \leq 10M\Omega$
				± 100	$10\Omega \leq R \leq 1M\Omega$	$10\Omega \leq R \leq 10M\Omega$	-
RS0805	1/4W	150V	300V	± 400	$1\Omega \leq R < 10\Omega$	$1\Omega \leq R < 10\Omega$	
				± 200	-	-	$10\Omega \leq R \leq 10M\Omega$
				± 100	$10\Omega \leq R \leq 1M\Omega$	$10\Omega \leq R \leq 10M\Omega$	-
RS1206	1/3W	200V	400V	± 400	$1\Omega \leq R < 10\Omega$	$1\Omega \leq R < 10\Omega$	
				± 200	-	-	$10\Omega \leq R \leq 10M\Omega$
				± 100	$10\Omega \leq R \leq 1M\Omega$	$10\Omega \leq R \leq 10M\Omega$	-
RS1210	1/2W	200V	400V	± 400	$1\Omega \leq R < 10\Omega$	$1\Omega \leq R < 10\Omega$	
				± 200	-	-	$10\Omega \leq R \leq 10M\Omega$
				± 100	$10\Omega \leq R \leq 1M\Omega$	$10\Omega \leq R \leq 10M\Omega$	-
RS2010	3/4W	400V	800V	± 400	$1\Omega \leq R < 10\Omega$	$1\Omega \leq R < 10\Omega$	
				± 200	-	-	$10\Omega \leq R \leq 10M\Omega$
				± 150	$10\Omega \leq R \leq 1M\Omega$	$10\Omega \leq R \leq 10M\Omega$	-
RS2512	1.5W	500V	1000V	± 400	$1\Omega \leq R < 10\Omega$	$1\Omega \leq R < 10\Omega$	
				± 200	-	-	$10\Omega \leq R \leq 10M\Omega$
				± 150	$10\Omega \leq R \leq 1M\Omega$	$10\Omega \leq R \leq 10M\Omega$	-

抗浪涌厚膜贴片电阻规格书- RS 系列

Approval Specification for Anti-Surge Thick Film Chip Resistors-Type **RS**

7.1. 规格-2 (Type-2)

型别 Type	额定功率 Rated power	最大工作电压 Max Working Voltage	最大过载电压 Max Overload Voltage	T.C.R. (PPM/°C)	阻值范围		
					F: $\pm 1.0\%$ G: $\pm 2.0\%$	J: $\pm 5.0\%$ K: $\pm 10\%$	M: $\pm 20\%$ N: $\pm 30\%$
RS0402	1/8W	50V	100V	± 400	$1\Omega \leq R < 10\Omega$	$1\Omega \leq R < 10\Omega$	
				± 300	-	$10\Omega \leq R < 1K\Omega$	
				± 200	$10\Omega \leq R \leq 1M\Omega$	$1K\Omega \leq R \leq 10M\Omega$	
RS0603	1/4W	150V	200V	± 400	$1\Omega \leq R < 10\Omega$	$1\Omega \leq R < 10\Omega$	
				± 200	-	-	$10\Omega \leq R \leq 10M\Omega$
				± 100	$10\Omega \leq R \leq 1M\Omega$	$10\Omega \leq R \leq 10M\Omega$	-
RS0805	2/5W	150V	300V	± 400	$1\Omega \leq R < 10\Omega$	$1\Omega \leq R < 10\Omega$	
				± 200	-	-	$10\Omega \leq R \leq 10M\Omega$
				± 100	$10\Omega \leq R \leq 1M\Omega$	$10\Omega \leq R \leq 10M\Omega$	-
RS1206	1/2W	200V	400V	± 400	$1\Omega \leq R < 10\Omega$	$1\Omega \leq R < 10\Omega$	
				± 200	-	-	$10\Omega \leq R \leq 10M\Omega$
				± 100	$10\Omega \leq R \leq 1M\Omega$	$10\Omega \leq R \leq 10M\Omega$	-
RS1210	3/4W	200V	400V	± 400	$1\Omega \leq R < 10\Omega$	$1\Omega \leq R < 10\Omega$	
				± 200	-	-	$10\Omega \leq R \leq 10M\Omega$
				± 100	$10\Omega \leq R \leq 1M\Omega$	$10\Omega \leq R \leq 10M\Omega$	-
RS2010	1W	400V	800V	± 400	$1\Omega \leq R < 10\Omega$	$1\Omega \leq R < 10\Omega$	
				± 200	-	-	$10\Omega \leq R \leq 10M\Omega$
				± 150	$10\Omega \leq R \leq 1M\Omega$	$10\Omega \leq R \leq 10M\Omega$	-
RS2512	2W	500V	1000V	± 400	$1\Omega \leq R < 10\Omega$	$1\Omega \leq R < 10\Omega$	
				± 200	-	-	$10\Omega \leq R \leq 10M\Omega$
				± 150	$10\Omega \leq R \leq 1M\Omega$	$10\Omega \leq R \leq 10M\Omega$	-

抗浪涌厚膜贴片电阻规格书- RS 系列

Approval Specification for Anti-Surge Thick Film Chip Resistors-Type **RS**

8.性能信赖性测试 (Performance Reliability Test Methods)

内容 Item	测试方法 Test Methods	测试条件 Test Conditions	规格 Specification
温度系数 Temperature Coefficient of Resistance (T.C.R.)□	JIS C 5201 4.8 IEC-60115-1 4.8	$TCR = (R - R_0) / (t - t_0) R_0 \times 10^6 \text{ (ppm)}$ R_0 电阻在室温下的阻值(resistance at room temperature) R 电阻在 155℃或-55℃下的阻值(resistance at 155℃ or -55℃) t_0 室温(room temperature) t 测试温度(test temperature 155℃ or -55℃)	参照 7 项
绝缘电阻 Insulation resistance	JIS C 5201 4.6 IEC-60115-1 4.6	电阻本体上加载 100V (DC) 绝缘耐压 60±5 秒后, 测量绝缘阻抗 Applying 100V (DC) to the resistor body and withstanding 60±5 seconds of insulation voltage. Measure the insulation resistance	≥ 10GΩ
短时间过负荷 Short-time overload	JIS C 5201 4.13 IEC-60115-1 4.13	加载 2.5 倍的额定电压, 时间 5 秒后测量试验前后的阻值变化率。 Applied 2.5 times of rated voltage for 5 second. Measure the variation of resistance. $\Delta R\% = \frac{R_2 - R_1}{R_1} * 100 \text{----- } (\%)$ R_1 = 试验前阻值(resistance before test) R_2 = 试验后阻值(resistance after test)	±(1.00%+0.05Ω)

抗浪涌厚膜贴片电阻规格书- RS 系列

Approval Specification for Anti-Surge Thick Film Chip Resistors-Type **RS**

内容 Item	测试方法 Test Methods	测试条件 Test Conditions	规格 Specification
抗焊锡热 Resistance to soldering heat	JIS C 5201 4.18 IEC-60115-1 4.18	锡炉温度 $260 \pm 5^{\circ}\text{C}$, 时间 10 ± 0.5 秒, 测量试验前后的阻值变化率。 Dip the resistance in a tin furnace at $260 \pm 5^{\circ}\text{C}$ for $10 \pm 0.5\text{sec}$. Measure the variation of resistance. $\Delta R\% = \frac{R_2 - R_1}{R_1} * 100 \text{-----} (\%)$ R1 = 试验前阻值(resistance before test) R2 = 试验后阻值(resistance after test)	< 5%: $\pm(0.50\% + 0.05\Omega)$ $\geq 5\%$: $\pm(1.00\% + 0.05\Omega)$
溶蚀 Leaching	JIS C 5201 4.18 IEC-60068-2-58 8.2.1	锡炉温度 $260 \pm 5^{\circ}\text{C}$, 时间 $30 + 1/-0$ 秒, 取出置于显微镜下观察焊锡面积。 Dip the resistance in a tin furnace at $260 \pm 5^{\circ}\text{C}$ for $30 + 1/-0\text{seconds}$, then take it out and observe the solder area under a microscope;	单边未吃锡面积 $\leq 5\%$ Individual leaching area $\leq 5\%$ 总未吃锡面积 $\leq 10\%$ Total leaching area $\leq 10\%$
耐溶剂 Resistance to Solvent	JIS-C-5201-1 4.29	将被测电阻器浸入 $20 \sim 25^{\circ}\text{C}$ 的异丙醇中 60 秒。然后将电阻器放置在室温下 48 小时。 The tested resistor be immersed into isopropyl alcohol of $20 \sim 25^{\circ}\text{C}$ for 60 secs. Then the resistor is left in the room for 48 hrs. $\Delta R\% = \frac{R_2 - R_1}{R_1} * 100 \text{-----} (\%)$ R1 = 试验前阻值(resistance before test) R2 = 试验后阻值(resistance after test)	$\pm(0.50\% + 0.05\Omega)$

抗浪涌厚膜贴片电阻规格书- RS 系列

Approval Specification for Anti-Surge Thick Film Chip Resistors-Type **RS**

内容 Item	测试方法 Test Methods	测试条件 Test Conditions	规格 Specification
负荷寿命 Operational Life	JIS C 5201 4.25 IEC-60115-1 4.25.1	恒定温度 70℃加载额定电压, 通电 1.5H, 断电 0.5H, 共持续 1000+24/-0 小时 Put the specimen in a chamber at 70℃ temperature, ON TIME:1.5H, OFF TIME:0.5H, rated voltage 1000 +24/-0 hours $\Delta R\% = \frac{R_2 - R_1}{R_1} * 100 \text{-----} (\%)$ R1 = 试验前阻值(resistance before test) R2 = 试验后阻值(resistance after test)	< 5%: ±(0.50%+0.05Ω) ≥ 5%: ±(3.00%+0.05Ω)
耐湿负荷 Load Life in Moisture	JIS C 5201 4.24 IEC-60115-1 4.24	电阻放入恒温恒湿箱, 温度 40±2℃, 湿度 90~95 %RH; 通额定电压 1.5 小时, 断电 0.5 小时; 重复通断电 1000 +48/-0 小时. 量测试验前后阻值变化率. Put the specimen in a chamber at 40±2℃ temperature and 90~95% relative humidity, then applied rated voltage for1.5H and rested for 0.5H repeatedly till total test time is 1000 +48/-0 .. Measure the variation of resistance. $\Delta R\% = \frac{R_2 - R_1}{R_1} * 100 \text{-----} (\%)$ R1 = 试验前阻值(resistance before test) R2 = 试验后阻值(resistance after test)	< 5%: ±(0.50%+0.05Ω) ≥ 5%: ±(2.00%+0.05Ω)

抗浪涌厚膜贴片电阻规格书- RS 系列

Approval Specification for Anti-Surge Thick Film Chip Resistors-Type **RS**


内容 Item	测试方法 Test Methods	测试条件 Test Conditions	规格 Specification
温度循环 Temperature cycling	JIS C 5201 4.19 IEC-60115-1 4.19	电阻放入温度循环机中, 温度 $155\pm 2^{\circ}\text{C}$ 至 $-55\pm 3^{\circ}\text{C}$, 共 5 个循环。量测试验前后阻值变化率。 Put specimen in a chamber which temperature can be changed to $155\pm 2^{\circ}\text{C}$ or $-55\pm 3^{\circ}\text{C}$, repeated 5 cycles. Measure the variation of resistance. $\Delta R\% = \frac{R_2 - R_1}{R_1} * 100 \text{-----} (\%)$ R_1 = 试验前阻值(resistance before test) R_2 = 试验后阻值(resistance after test)	< 5%: $\pm(0.50\%+0.05\Omega)$ $\geq 5\%:$ $\pm(1.00\%+0.05\Omega)$
端子弯曲 Bending Strength	JIS C 5201 4.33 IEC-60115-1 4.33	电阻焊接在测试板上进行弯折, 弯折保持时间 5 秒, 量测试验前后阻值变化率 Specimen shall be mounted on test board, then bend the board and maintained for 5s. Measure the variation of resistance. 弯折深度 D: 0402/0603/0805=5mm 1206/1210=3mm 2010/2512=2mm $\Delta R\% = \frac{R_2 - R_1}{R_1} * 100 \text{-----} (\%)$ R_1 = 试验前阻值(resistance before test) R_2 = 试验后阻值(resistance after test)	$\pm(1.00\%+0.05\Omega)$
单脉冲高压过载 Single pulse high voltage overload	IEC-60115	严重等级 4 级 加载电压为 $U = 10 * \sqrt{P_{70} * R}$ 或 $U = 2 * U_{\text{MAX}}$ 两者选其小。每分钟一个脉冲, 10 个脉冲; 每个脉冲宽度为 $10/700\mu\text{s}$。 Severity No. 4: $U = 10 * \sqrt{P_{70} * R}$ or $U = 2 * U_{\text{MAX}}$ Whichever is the less severe. One pulse per minute, 10 pulses; Each Pulse Width is $10 / 700\mu\text{s}$.	$\pm(1.00\%+0.05\Omega)$

抗浪涌厚膜贴片电阻规格书- RS 系列

Approval Specification for Anti-Surge Thick Film Chip Resistors-Type **RS**

9. 包装规格 (Tapping Specification)


9.1 卷盘尺寸 (reel dimension)

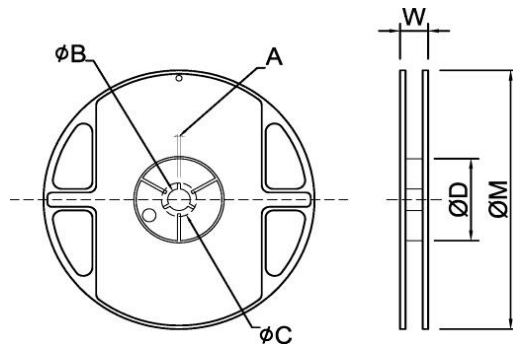

Unit: mm

Type	Size		A	φ B	φ C	φ D	W	φ M
0402	7"	10K Reel	2.0±0.5	13.5±1.0	21±1.0	60±1.0	11.5±2.0	178±2.0
	13"	40K/50K Reel	2.0±0.5	13.5±1.0	21±1.0	100±1.0	11.5±2.0	330±2.0
0603 0805 1206 1210	7"	5K Reel	2.0±0.5	13.5±1.0	21±1.0	60±1.0	11.5±2.0	178±2.0
0603 0805 1206	10"	10K Reel	2.0±0.5	13.5±1.0	21±1.0	100±1.0	11.5±2.0	254±2.0
	13"	20K Reel	2.0±0.5	13.5±1.0	21±1.0	100±1.0	11.5±2.0	330±2.0
2010 2512	7"	4K Reel	2.0±0.5	13.5±1.0	21±1.0	60±1.0	16.0±2.0	178±2.0

9.2 包装尺寸 (packing dimension)

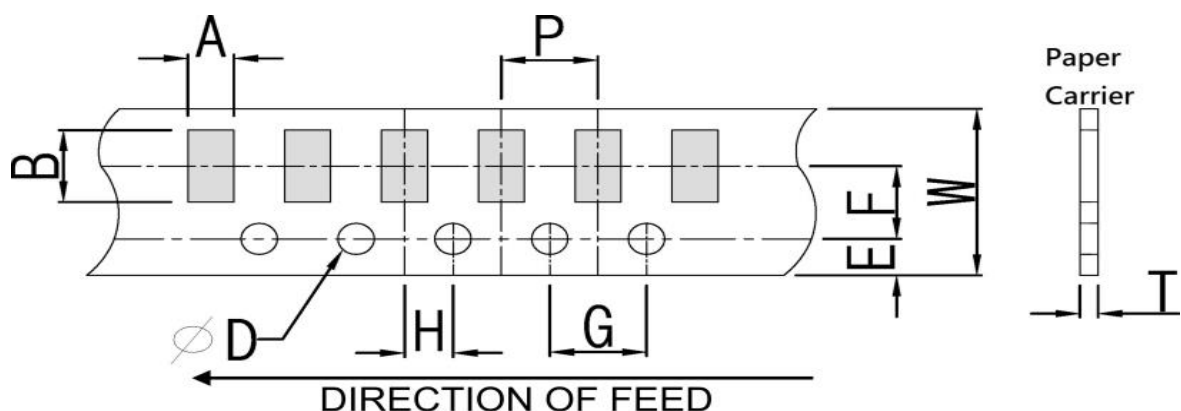


抗浪涌厚膜贴片电阻规格书- RS 系列

Approval Specification for Anti-Surge Thick Film Chip Resistors-Type **RS**

Unit: mm

Paper Type

Type	A	B	W	E	F	G	H	T	ΦD	P
0402	0.70±0.1	1.20±0.1	8.0±0.2	1.75±0.1	3.5±0.05	4.0±0.1	2.0±0.05	0.45±0.1	1.50± ^{0.1} _{0.0}	2.0±0.1
0603	1.05±0.2	1.80±0.2	8.0±0.2	1.75±0.1	3.5±0.05	4.0±0.1	2.0±0.05	0.60±0.1		4.0±0.1
0805	1.55±0.2	2.30±0.2	8.0±0.2	1.75±0.1	3.5±0.05	4.0±0.1	2.0±0.05	0.75±0.1		4.0±0.1
1206	1.90±0.2	3.50±0.2	8.0±0.2	1.75±0.1	3.5±0.05	4.0±0.1	2.0±0.05	0.75±0.1		4.0±0.1
1210	2.85±0.2	3.50±0.2	8.0±0.2	1.75±0.1	3.5±0.05	4.0±0.1	2.0±0.05	0.75±0.1		4.0±0.1

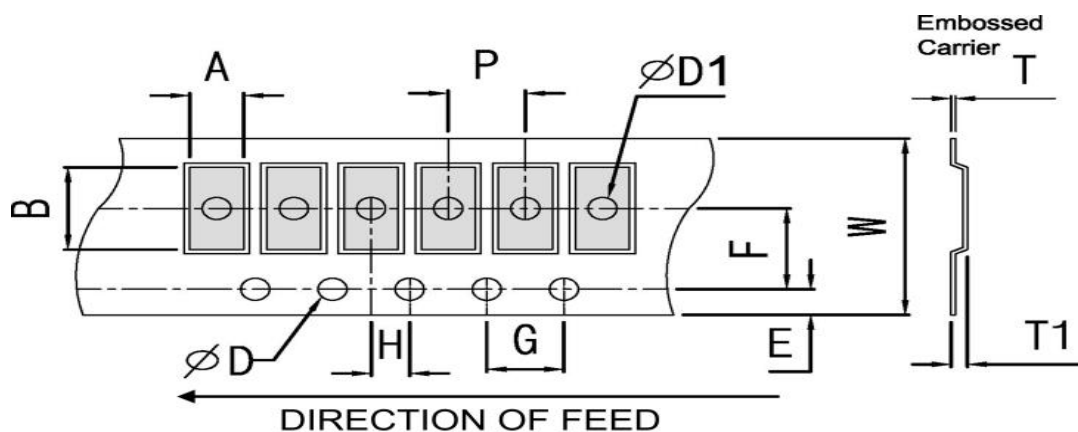


Unit: mm

Embossed Type

Type	A	B	W	E	F	G	H	T	ΦD	ΦD1	T1	P
2010	2.80±0.2	5.60±0.2	12±0.1	1.75±0.1	5.5±0.05	4.0±0.1	2.0±0.05	0.23±0.1	1.50± ^{0.1} _{0.0}	1.5±0.1	0.85±0.15	4.0±0.1
2512	3.40±0.2	6.70±0.2	12±0.1	1.75±0.1	5.5±0.05	4.0±0.1	2.0±0.05	0.23±0.1		1.5±0.1	0.95±0.15	4.0±0.1

Approval Specification for Anti-Surge Thick Film Chip Resistors-Type **RS**


9.3 前后引线尺寸 (Front & Back Lead Dimension)

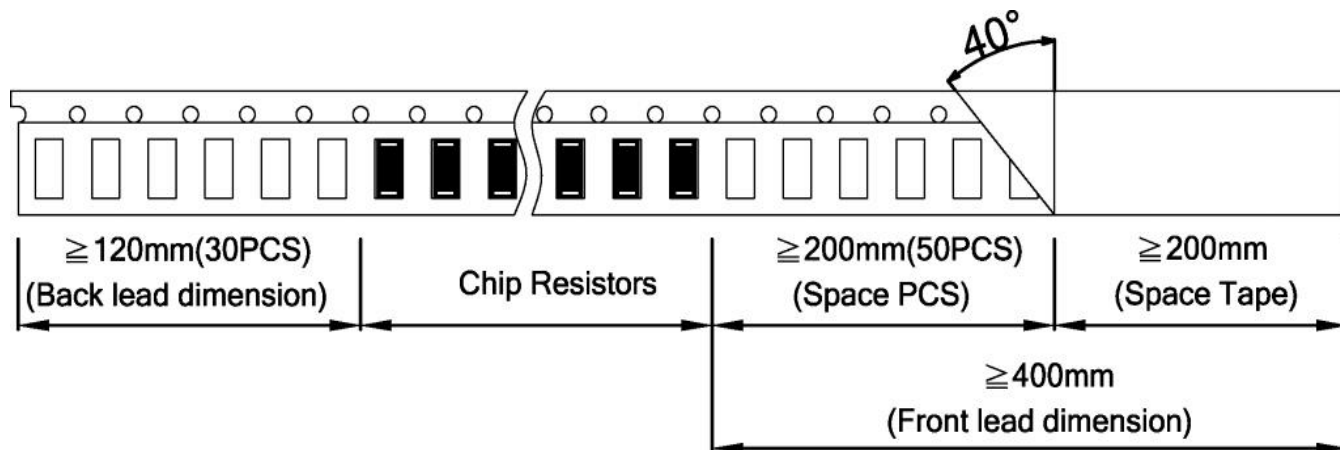

10. 上胶带剥离力测试 (Peel force of top cover tape)

上胶带以 300mm/分钟的速度，沿 165~180 度角的方向进行剥离，如下图所示。纸带的剥离力范围为 10g~70g；载带的剥离力范围为 15g~80g


The top cover tape is pulled at a speed of 300 mm/min with the angle between the tape during peel and the direction of unreeling maintained at 165 to 180 degree as following picture. The peel force of paper carrier tape shall be 10 g to 70 g, the peel force of plastic carrier tape shall be 15 g to 80 g

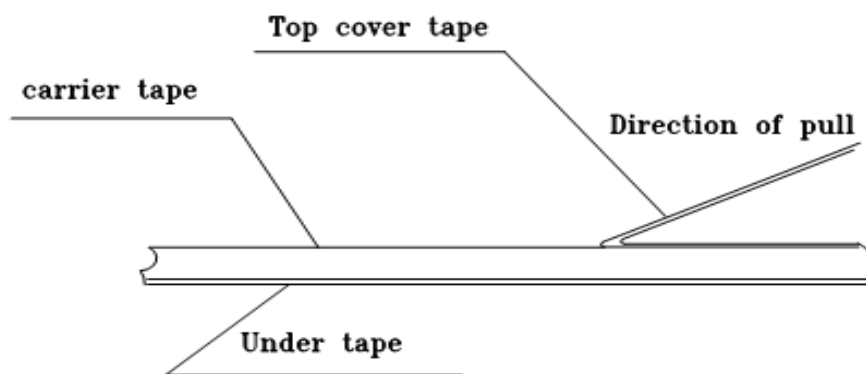

抗浪涌厚膜贴片电阻规格书- RS 系列

Approval Specification for Anti-Surge Thick Film Chip Resistors-Type **RS**


11. 焊盘尺寸 (Recommended land patterns):

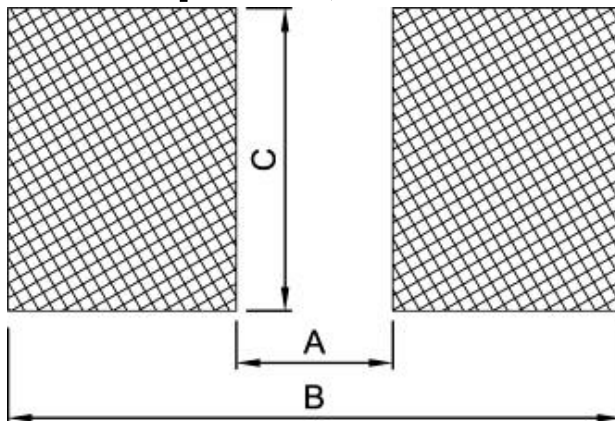

Item \ Type	Dimensions (mm)						
	0402	0603	0805	1206	1210	2010	2512
A	0.60	0.80	1.30	2.20	2.00	3.80	4.90
B	1.60	2.40	2.90	4.20	4.40	6.60	8.10
C	0.70	1.00	1.40	1.70	2.70	2.70	3.40


12. 焊接 (soldering)

12.1 建议回流焊曲线 (Recommend reflow soldering profile)

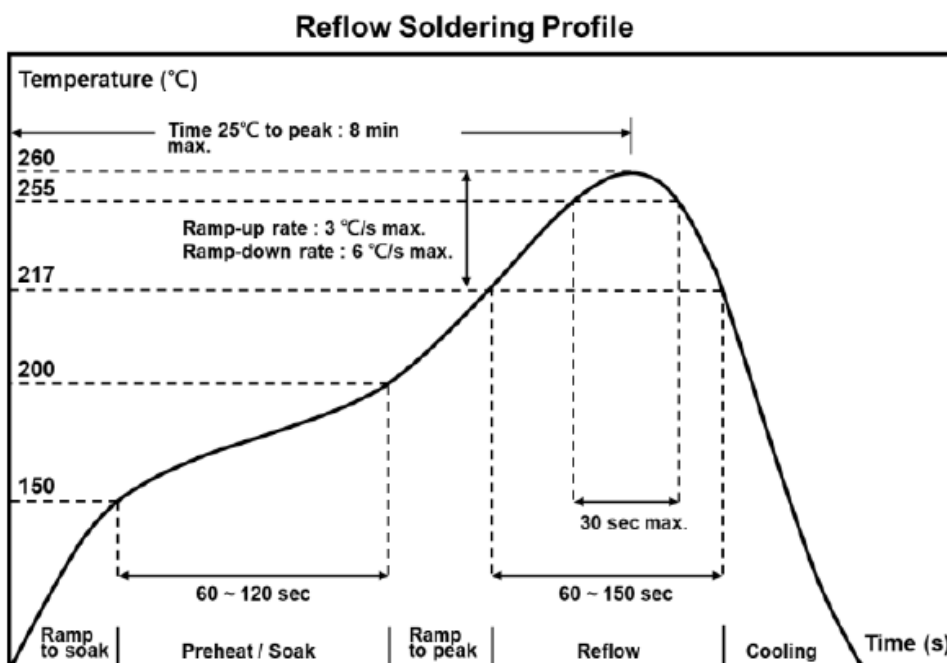

Approval Specification for Anti-Surge Thick Film Chip Resistors-Type **RS**

12.2 建议波峰焊曲线 (Recommend wave soldering profile)

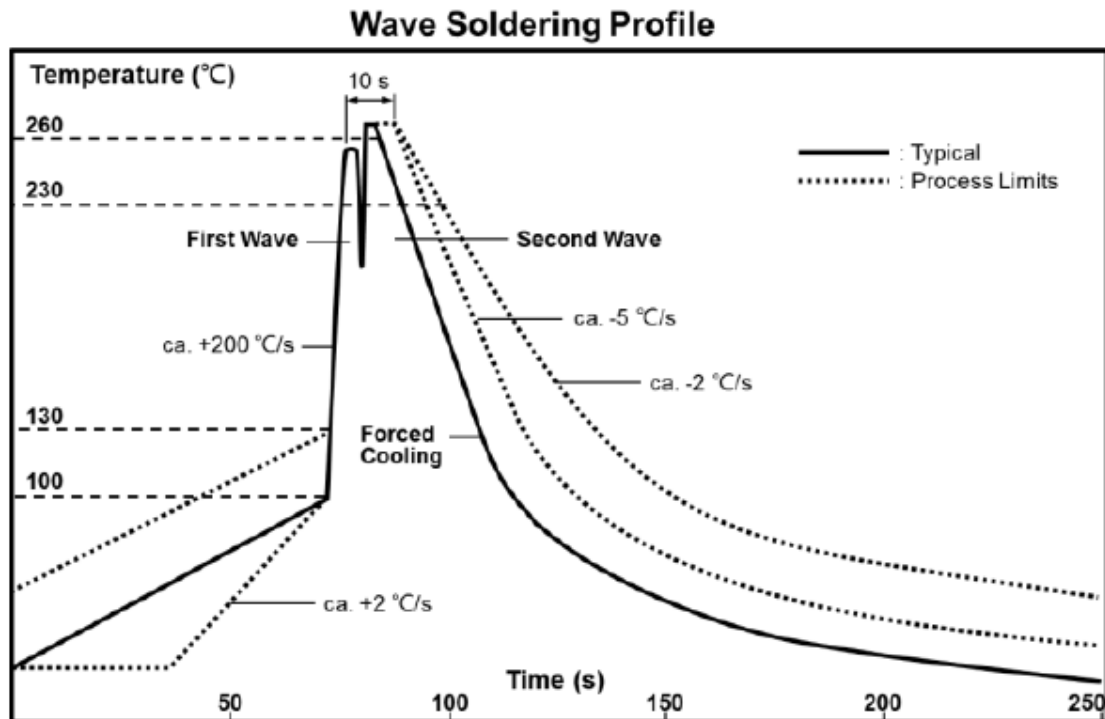

12.3 手工焊温度 (hand soldering temperature)

烙鐵溫度 350°C 3~5 秒之內，避免烙鐵接觸電阻本體

The iron temperature is 350°C, hand soldering time less than 3~5S. Avoid solder iron tip direct touch the components body.

产品规格及资料如有更改，恕不另行通知。

All product specification and data are subject to change without notice.