

规格书

SPECIFICATION

丽智电子（南通）有限公司

地址：江苏省南通市通州区康富路 789 号

Address: No. 789, Kang Fu Road Tongzhou District Nantong city Jiangsu province

Tel: 0086-0513-68856666

Fax: 0086-0513-68383688

抗硫化厚膜贴片电阻规格书- AL 系列

Approval Specification for Anti- Sulfur Thick Film Chip Resistors-Type **AL**

1. 范围 (scope) :

1.1 适用于本公司所生产的无铅、抗硫化厚膜贴片电阻 AL 系列

This specification applies to Anti-Sulfur thick film chip resistors which meet requirements of Pb free.

1.2 本公司的无铅产品指的贴片电阻端电极无铅，而存在于电阻层的玻璃中的符合 RoHS 豁免条款。

There no lead exists in terminal of resistor, and lead which exist in glass of resistor layer meets RoHS exemption.

1.3 符合 AEC-Q200 條款

The relevant provisions of the AEC-Q200

2. 产品料号 (part number) :

0603 1/10W 5% 100Ω

AL0603JA0101G

<u>AL</u>	<u>0603</u>	<u>J</u>	<u>A</u>	<u>0101</u>	<u>G</u>	
↓	↓	↓	↓	↓	↓	↓
类型 (Type)	尺寸 (Size)	公差	额定功率	阻值	包装代码	区别码
AL: 抗硫化	0201	Tolerance	Rated Power	Resistance value	Packing Code	Distinction Code
厚膜贴片电	0402	D=±0.5%	1= 1W	±0.5%, ±1% :	G=成品, 7 inch reel	空码 = 无指定
阻	0603	F=±1%	2= 3/4W	49R9=49.9 Ω	常规包装量	- "X" = 特别指
(Anti-Sulfur	0805	G=±2%	3= 1/2W	1002=10K Ω	H=成品, 10 inch reel	定, 不同字母代表
thick film	1206	J=±5%	4= 1/4W	±2%, ±5% :	两倍包装量	不同指定
chip	1210		8= 1/8W	06R8=6.8 Ω	Z=成品, 15K包装量	
resistors)	2010		A= 1/10W	0564=560K Ω	S=成品, 20K包装量	
	2512		F= 1/16W		U=成品, 50K包装	
			H= 1/20W		V=bulk (散料)	

抗硫化厚膜贴片电阻规格书- AL 系列

Approval Specification for Anti- Sulfur Thick Film Chip Resistors-Type **AL**

3. 电阻本体字码标示 (Marking on the Resistor's Body):

※ 0201、0402 因本体太小，本体上无字码标示 For 0201、0402 size, no marking on the body due to the small size of the resistor. ※ 公差±5%的产品，以三字码标公差±5%的产品，以三字码标示，前两位表示阻值的有效数字，最后一位表示 10 的乘幂 ±5% tolerance product: the marking is 3 digits, the first 2 digits are significant figures of resistance value and the 3rd one denotes the power number of 10, (10^x). ※ ±1%的产品，以四字码标示，前三位表示阻值的有效数字，最后一位表示 10 的乘幂 ±1% tolerance product: the marking is 4 digits, the first 3 digits are significant figures of resistance value and the 4th one denotes the power number of 10, (10^x). ※ 0603 ±1% E96 系列的标准阻值，因电阻本体太小，采用三位代码标示。 Standard E96 series values of AL0603 ±1%: due to the small size of the resistor's body, use 3digits code to indicate the resistance value.		472=47×10 ² =4.7K Ω
		10Ω 以下标示：5R6=5.6Ω Below 10Ω: 5R6=5.6Ω
		4992=499×10 ² =49.9K Ω
		100Ω 以下标示：6R81=6.81Ω Below 100Ω: 6R81=6.81Ω

抗硫化厚膜贴片电阻规格书- AL 系列

Approval Specification for Anti- Sulfur Thick Film Chip Resistors-Type **AL**

0603 ±1% E96 系列的标准阻值代码(Standard E96 Series Resistance Value Code for 0603 ±1% Marking)

代码 Code	阻值 Value	代码 Code	阻值 Value	代码 Code	阻值 Value	代码 Code	阻值 Value	代码 Code	阻值 Value	代码 Code	阻值 Value
01	100	17	147	33	215	49	316	65	464	81	681
02	102	18	150	34	221	50	324	66	475	82	698
03	105	19	154	35	226	51	332	67	487	83	715
04	107	20	158	36	232	52	340	68	499	84	732
05	110	21	162	37	237	53	348	69	511	85	750
06	113	22	165	38	243	54	357	70	523	86	768
07	115	23	169	39	249	55	365	71	536	87	787
08	118	24	174	40	255	56	374	72	549	88	806
09	121	25	178	41	261	57	383	73	562	89	825
10	124	26	182	42	267	58	392	74	576	90	845
11	127	27	187	43	274	59	402	75	590	91	866
12	130	28	191	44	280	60	412	76	604	92	887
13	133	29	196	45	287	61	422	77	619	93	909
14	137	30	200	46	294	62	432	78	634	94	931
15	140	31	205	47	301	63	442	79	649	95	953
16	143	32	210	48	309	64	453	80	665	96	976

0603 ±1% E96 系列的指数代码(Multiplier Code for 0603 ±1% Marking)

代码 Code	Y	X	A	B	C	D	E	F
指数 Multiplier	10^{-2}	10^{-1}	10^0	10^1	10^2	10^3	10^4	10^5

阻值标示如下(So the resistance value are marked as the following examples)



$$10D=124 \times 10^3=124K \Omega$$



$$38Y=243 \times 10^{-2}=2.43 \Omega$$

0603 ±1%的产品，在标准 E24 系列中，但不属于 E96 系列，标示与 5%的字码相同，但是在字码下加一条线
 Standard E24 and not belong to E96 series values of 0603 ±1%, the marking is the same as 5% tolerance but marking as underline



$$\underline{331}=33 \times 10^1=330 \Omega$$





$$\underline{560}=56 \times 10^0=56 \Omega$$

抗硫化厚膜贴片电阻规格书- AL 系列

Approval Specification for Anti- Sulfur Thick Film Chip Resistors-Type **AL**



4. 尺寸 (dimension) :

尺寸 dimension	 					单位 (unit) : mm
型别(Type)	L	W	T	E	e	
AL0201	0.60±0.03	0.30±0.03	0.23±0.03	0.10±0.05	0.15±0.05	
AL0402	1.00±0.05	0.50±0.05	0.30±0.05	0.15±0.10	0.20±0.10	
AL0603	1.60±0.10	0.80±0.10	0.45±0.10	0.25±0.20	0.30±0.20	
AL0805	2.00±0.15	1.25±0.15	0.50±0.10	0.35±0.20	0.40±0.20	
AL1206	3.10±0.15	1.60±0.15	0.55±0.10	0.45±0.25	0.40±0.25	
AL1210	3.10±0.15	2.50±0.15	0.55±0.15	0.35±0.25	0.60±0.25	
AL2010	5.00±0.20	2.50±0.20	0.55±0.15	0.65±0.25	0.50±0.25	
AL2512	6.25±0.20	3.10±0.20	0.55±0.15	0.85±0.25	0.95±0.25	

抗硫化厚膜贴片电阻规格书- AL 系列

Approval Specification for Anti- Sulfur Thick Film Chip Resistors-Type **AL**

5. 功率衰减曲线 (Derating Curve) :

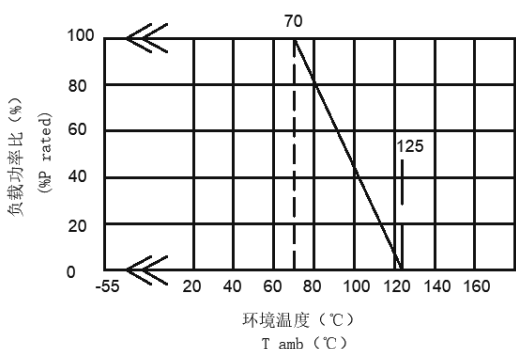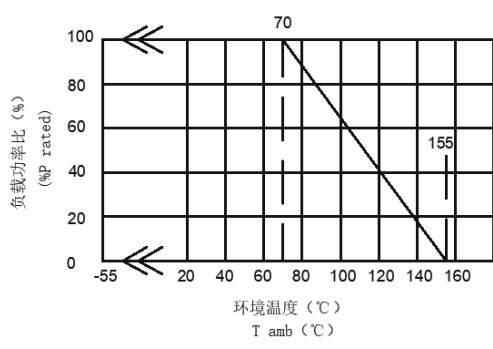
使用温度范围 Operating Temperature Range	-55℃~+125℃ (0201)	-55℃~+155℃ (其它)
说明 Directions	电阻的额定功率基于环境温度-55℃到70℃，周围温度若超遇70℃至125℃之间，功率可照下图曲线予以修定之。 Resistors shall have a power rating based on continuous load operation at an ambient temperature from -55℃ to 70℃.For temperature in excess of 70℃ the load shall be derated as shown in figure.	电阻的额定功率基于环境温度-55℃到70℃，周围温度若超遇70℃至155℃之间，功率可照下图曲线予以修定之。 Resistors shall have a power rating based on continuous load operation at an ambient temperature from -55℃ to 70℃.For temperature in excess of 70℃，the load shall be derated as shown in figure.
功率衰减曲线 Derating Curve	 负载功率比 (%P rated) 环境温度 (°C) T amb (°C)	 负载功率比 (%P rated) 环境温度 (°C) T amb (°C)

储存条件 (storage condition) : 5~30℃, 30~75%RH.

抗硫化厚膜贴片电阻规格书- AL 系列

Approval Specification for Anti- Sulfur Thick Film Chip Resistors-Type **AL**

6.电阻结构（Construction）：

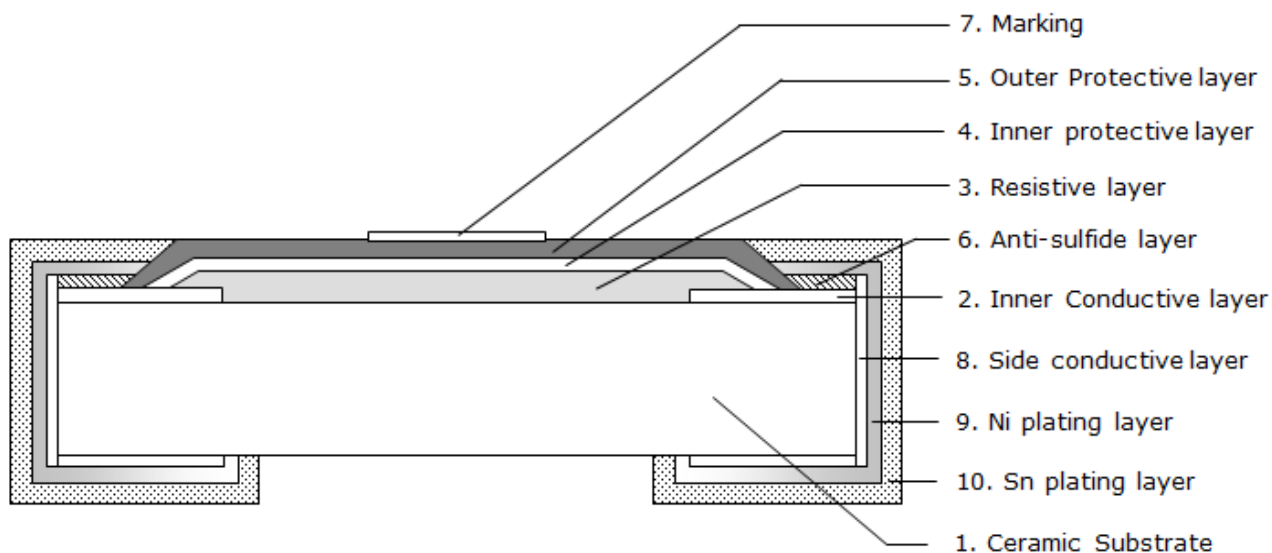

No.	结构 construction	主要材料 Major material
1	陶瓷基板 Ceramic substrate	三氧化二铝 Al ₂ O ₃
2	内电极 Inner Conductive layer	银 Ag-Pd
3	阻体层 Resistive layer	氧化钌+玻璃 RuO ₂ + glass
4	内保护层 Inner protective layer	玻璃 Glass
5	外保护层 Outer Protective layer	环氧树脂 Epoxy
6	抗硫化层 Anti-Sulfide layer	银 Ag
7	文字 Marking	环氧树脂 Epoxy
8	侧电极 Side conductive layer	镍铬合金 Ni-Cr
9	镍电极 Ni plating layer	镍 Ni
10	锡电极 Sn plating layer	雾锡 Matte Tin

抗硫化厚膜贴片电阻规格书- AL 系列

Approval Specification for Anti- Sulfur Thick Film Chip Resistors-Type **AL**

7. 阻值范围 (resistance range) :

型别 Type	阻值范围 Resistance Range		
	0.5%	1%	2%&5%
AL0201	10Ω~10MΩ	1Ω~10MΩ	1Ω~10MΩ
AL0402	10Ω~10MΩ	1Ω~22MΩ	1Ω~22MΩ
AL0603	10Ω~10MΩ	1Ω~22MΩ	1Ω~22MΩ
AL0805	10Ω~10MΩ	1Ω~22MΩ	1Ω~22MΩ
AL1206	10Ω~10MΩ	1Ω~22MΩ	1Ω~22MΩ
AL1210	10Ω~10MΩ	1Ω~22MΩ	1Ω~22MΩ
AL2010	10Ω~10MΩ	1Ω~22MΩ	1Ω~22MΩ
AL2512	10Ω~10MΩ	1Ω~22MΩ	1Ω~22MΩ

8. 电气特性 (electricS characteristics) :

型别 Type	AL0201	AL0402	AL0603	AL0805	AL1206	AL1210	AL2010	AL2512
额定功率 Rated power	1/20W	1/16W	1/10W	1/8W	1/4W	1/2W	3/4W	1W
最大工作电压 Max Working Voltage	25V	50V	75V	150V	200V	200V	200V	200V
最大过负荷电压 Max Overload Voltage	50V	100V	150V	300V	400V	500V	500V	500V
绝缘耐压 Dielectric Withstanding Voltage	75V	150V	220V	430V	570V	710V	710V	710V
0Ω阻值 Resistance Value Of Jumper	< 50mΩ							
0Ω额定电流 Rated Current Of Jumper	0.5A	1.0A	1.0A	2.0A	2.0A	2.0A	2.0A	2.0A
0Ω最大电流 Max Current Of Jumper	1.0A	2.0A	2.0A	5.0A	10.0A	10.0A	10.0A	10.0A

备注 (remark) :

※ 额定电压计算公式 (The rated voltage is calculated by the following formula) :

$$E = \sqrt{RP}$$

E : 额定电压 (Rated Voltage) (V)

P : 额定功率 (Rated Power) (W)

R : 电阻阻值 (Resistance) (ohm)

※ 如果计算出的电压超过此型别的最大工作电压,则此型别的最大工作电压为此电阻的额定电压。

In case the value calculated by the formula exceed the maximum working voltage as above table 9, the maximum working voltage shall be regarded as rated voltage.

抗硫化厚膜贴片电阻规格书- AL 系列

Approval Specification for Anti- Sulfur Thick Film Chip Resistors-Type **AL**

9.性能信赖性测试 (Performance Reliability Test Methods)

内容 Item	测试方法 Test Methods	测试条件 Test Conditions	规格 Specification
温度系数 Temperature Coefficient	JIS C 5201 4.8	$TCR = (R - R_0) / (t - t_0) R_0 \times 10^6 \text{ (ppm)}$ R_0 电阻在室温下的阻值(resistance at room temperature) R 电阻在 125°C或-55°C下的阻值(resistance at 125°C or -55°C) t_0 室温(room temperature) t 测试温度 (test temperature 125°C or -55°C)	0201 规格: $1\Omega \leq R < 10\Omega$: -200~+400PPM/°C $10\Omega \leq R \leq 10M\Omega$: $\pm 200 \text{ PPM/}^\circ\text{C}$ 0402~2512 规格: $1\Omega \leq R < 10\Omega$: -200~+400PPM/°C $10\Omega \leq R \leq 10M\Omega$: $\pm 100 \text{ PPM/}^\circ\text{C}$ $> 10M\Omega$: $\pm 200 \text{ PPM/}^\circ\text{C}$
焊锡性 Solderability	J-STD-002	用于引脚型和表面贴装型元件, 不需要电气测试. 放大倍数 50 倍. 测试条件: 表面贴装型: a)方法, 干热@155°C,4 小时,@245°C,3±0.5 秒 b)方法, 蒸煮 8 小时, @245°C,3±0.5 秒 For pin and surface-mount components, no electrical testing required. Magnification 50 times.Test conditions: Surface mount type: a) Method: dry heat @155°C,4 hours, @245°C,3±0.5 seconds b) Method: cook for 8 hours at @245°C,3±0.5 seconds	最少 95%面积上锡 (Min 95% coverage)
绝缘电阻 Insulation resistance	JIS C 5201 4.6	电阻本体上加载绝缘耐压 60±5 秒后, 测量绝缘阻抗 Applied the dielectric withstanding voltage on the center of body for 60±5seconds. Then measure insulation resistance	> 10GΩ

抗硫化厚膜贴片电阻规格书- AL 系列

Approval Specification for Anti- Sulfur Thick Film Chip Resistors-Type **AL**

内容 Item	测试方法 Test Methods	测试条件 Test Conditions	规格 Specification
绝缘耐压 Dielectric withstanding voltage	JIS C 5201 4.7	电阻本体上加载绝缘耐压 60±5 秒。 Applied the dielectric withstanding voltage on the center of body for 60±5 seconds.	无击穿、飞弧及可见机械性损伤 No evidence of flashover, mechanical damage arcing or insulation breakdown
短时间过负荷 Short-time overload	JIS C 5201 4.13	加载 2.5 倍的额定电压, 时间 5 秒后测量试验前后的阻值变化率。 Applied 2.5 times of rated voltage for 5 second. Measure the variation of resistance. $\Delta R\% = \frac{R_2 - R_1}{R_1} * 100 \text{-----} (\%)$ R1 = 试验前阻值(resistance before test) R2 = 试验后阻值(resistance after test)	±(1.00%+0.05Ω) Max
抗焊锡热 Resistance to soldering heat	MIL-STD-202 METHOD 210	锡炉温度 260±5℃,时间 10±0.5 秒, 样品不进行预热。注意:单一波峰焊-表面贴装元件按程序, 浸入器件本体的 1.5mm 的深度。Soldering bath at 260±5 °C for 10 ± 0.5sec. No pre-heat of samples. Note: Single Wave Solder-Procedure 2 for SMD and Procedure 1 for Leaded with solder within 1.5mm of device body. $\Delta R\% = \frac{R_2 - R_1}{R_1} * 100 \text{-----} (\%)$ R1 = 试验前阻值(resistance before test) R2 = 试验后阻值(resistance after test)	±(1.00%+0.05Ω) Max
端子弯曲 Board Flex	AEC-Q200-005	焊接在 PCB 板上, 0201 ~ 1206 弯板深度 5mm, 1210 以上弯板深度 2mm; 保持 60±1s Reflow solder the samples on PCB, 0201 ~ 1206 bending plate depth 5mm, 1210 above bending plate depth 2mm;Keep 60±1 s $\Delta R\% = \frac{R_2 - R_1}{R_1} * 100 \text{-----} (\%)$ R1 = 试验前阻值(resistance before test) R2 = 试验后阻值(resistance after test)	±(1.00%+0.05Ω) Max

抗硫化厚膜贴片电阻规格书- AL 系列


Approval Specification for Anti- Sulfur Thick Film Chip Resistors-Type **AL**

内容 Item	测试方法 Test Methods	测试条件 Test Conditions	规格 Specification
负荷寿命 Operational life	JIS C 5201 4.25 IEC-60115-1 4.25.1	恒定温度 70°C, 加载额定电压, ON TIME:1.5H, OFF TIME:0.5H, 额定电压 1000 ^{+24/-0} 小时 Load rated voltage, ON TIME:1.5H, OFF TIME:0.5H, rated voltage 1000 ^{+24/-0} hours $\Delta R\% = \frac{R_2 - R_1}{R_1} * 100 \text{-----} (\%)$ R1 = 试验前阻值(resistance before test) R2 = 试验后阻值(resistance after test)	$\pm(2.00\%+0.05\Omega)$ Max
耐湿特性 Biased Humidity	MIL-STD-202 METHOD 103	加载 10%额定功率, 85°C/85%RH, 持续通电 1000H,试验结束 24±4 小时后进行测试 1000 hours 85°C/85%RH. Note: Specified conditions: 10% of operating power. Measurement at 24±4 hours after test conclusion. $\Delta R\% = \frac{R_2 - R_1}{R_1} * 100 \text{-----} (\%)$ R1 = 试验前阻值(resistance before test) R2 = 试验后阻值(resistance after test)	$\pm(2.00\%+0.05\Omega)$ Max
温度循环 Temperature cycling	JESD22 METHOD JA -104	-55°C~+155°C, 循环 1000 次, 在每一个极限温度 持续时间不超过 30 分钟, 且温度转换时间不超过 1 分钟, 试验结束 24±4 小时后进行测试. 1000 Cycles (-55°C to +155°C) Measurement at 24±4 hours after test conclusion. 30min maximum dwell time at each temperature extreme. 1min. maximum transition time. $\Delta R\% = \frac{R_2 - R_1}{R_1} * 100 \text{-----} (\%)$ R1 = 试验前阻值(resistance before test) R2 = 试验后阻值(resistance after test)	$\pm(2.0\%+0.05\Omega)$ Max

抗硫化厚膜贴片电阻规格书- AL 系列

Approval Specification for Anti- Sulfur Thick Film Chip Resistors-Type **AL**

内容 Item	测试方法 Test Methods	测试条件 Test Conditions	规格 Specification
温湿循环 Moisture resistance	MIL-STD-202 METHOD 106	25 °C~65 °C,90~100%RH, 2.5 小时; 65 °C 90~100%RH, 3小时; 65°C~25°C,80~100%RH,2.5小时,10个循环, 试验结束24±4小时后进行测试. 25 °C~65 °C,90~100%RH, 2.5H; 65 °C 90~100%RH, 3H; 65°C~25°C 80~100%RH, 2.5H, 10 cycles, Measurement at 24±4 hours after test conclusion. $\Delta R\% = \frac{R_2 - R_1}{R_1} * 100 \text{----- } (\%)$ R1 = 试验前阻值(resistance before test) R2 = 试验后阻值(resistance after test)	±(2.00%+0.05Ω) Max
高温储存 High Temperature Exposure(Storage)	MIL-STD-202 METHOD 108	155°C下放置 1000h, 不加载功率, 试验结束 24±4 小时后进行测试. 1000 hrs. @ T=155 °C . Unpowered. Measurement at 24 ± 4 hours after test conclusion $\Delta R\% = \frac{R_2 - R_1}{R_1} * 100 \text{----- } (\%)$ R1 = 试验前阻值(resistance before test) R2 = 试验后阻值(resistance after test)	±(1.00%+0.05Ω) Max
ESD 试验 ESD test	AEC-Q200-002	加载规定静电电压2次/间隔1秒, 0201/0402: 0.5KV 0603规格: 1KV 其它规格: 2KV 0201/0402: 0.5KV, 0603: 1.0KV Other: 2KV, 2times/1s $\Delta R\% = \frac{R_2 - R_1}{R_1} * 100 \text{----- } (\%)$ R1 = 试验前阻值(resistance before test) R2 = 试验后阻值(resistance after test)	±(3.0%+0.05Ω) Max



内容 Item	测试方法 Test Methods	测试条件 Test Conditions	规格 Specification
硫化试验 Sulfur test	EIA-977*B	在玻璃容器底部的培养皿上铺满 10mm 厚的硫粉, 放置在 105±3℃的恒温箱中, 0402~2512: 750hrs, 0201: 500hrs Cover the tray or base of the chamber with a bed of sulfur to 10 mm depth minimum, bake at 105±3℃, 0402~2512: 750hrs, 0201: 500hrs 预处理: 前后经历3次回流焊+100次温冲 Pretreatment: before and after three reflow soldering +100 thermal shock $\Delta R\% = \frac{R_2 - R_1}{R_1} * 100 \quad (\%)$ R1 = 试验前阻值(resistance before test) R2 = 试验后阻值(resistance after test)	±(3.0% +0.05Ω) Max

10.1 卷盘尺寸 (reel dimension)

尺寸 Dimensions		A	B	C	F	W
AL0201 AL0402 AL0603 AL0805 AL1206 AL1210	mm	178±2.0	60.0±1.0	13.5±0.5	11.4±0.1	9.00±0.3
	Inch	7.008±0.079	2.362±0.039	0.531±0.020	0.449±0.039	0.354±0.012
AL2010 AL2512	mm	178±2.0	60.0±1.0	13.5±0.5	15.4±1.0	13.0±0.3
	Inch	7.008±0.079	2.362±0.039	0.531±0.020	0.606±0.039	0.512±0.012

文件編號：613-00-063 版本:V7.0

抗硫化厚膜贴片电阻规格书- AL 系列

Approval Specification for Anti- Sulfur Thick Film Chip Resistors-Type **AL**


2010/2512 Quantity per Reel 4,000 pcs/Reel

(3) 0603/0805/1206/1210 每卷 5,000pcs


0603/0805/1206/1210 Quantity per Reel 5,000 pcs/Reel

(4) 0402 可依客户要求每卷 20,000pcs

0402 Quantity per Reel 20,000 pcs/Reel as customer requirement

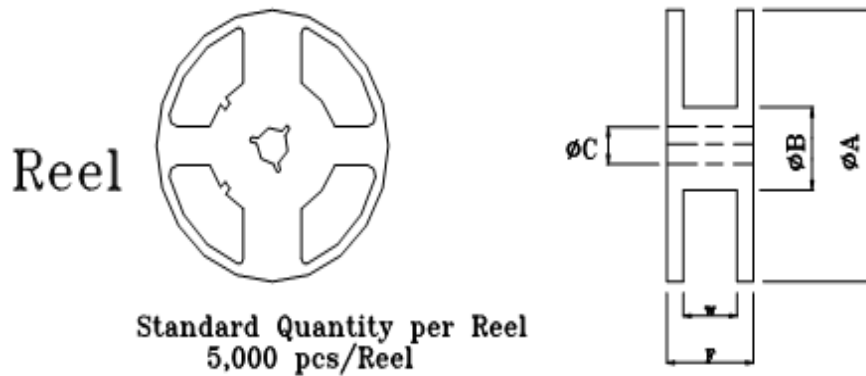

10.2 包装尺寸 (packing dimension)

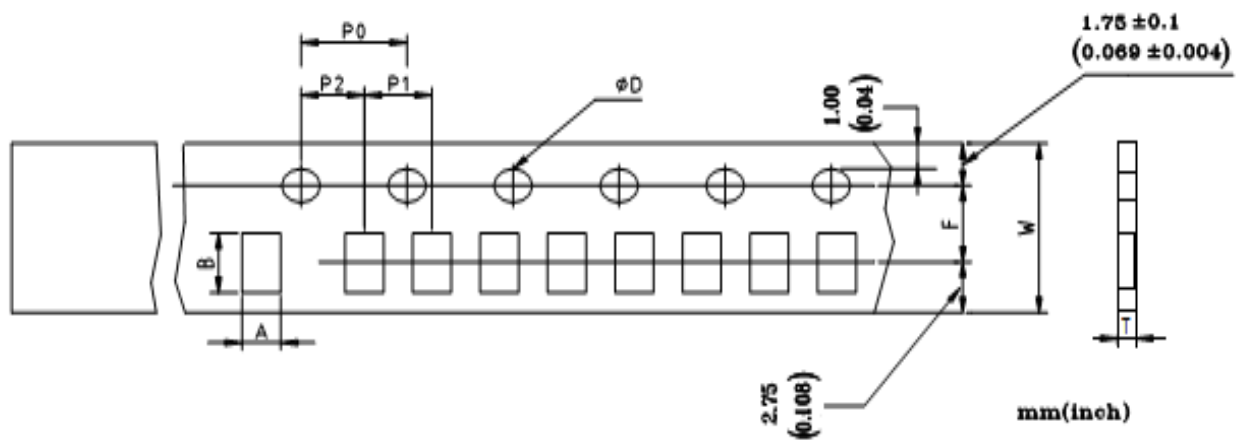

抗硫化厚膜贴片电阻规格书- AL 系列

Approval Specification for Anti- Sulfur Thick Film Chip Resistors-Type **AL**


Unit: mm

Dimensions	A	B	D	F	P0	P1	P2	W	T
AL0201	0.38±0.05	0.68±0.05	1.50± ^{0.1} _{0.0}	3.50±0.05	4.00±0.10	2.00±0.10	2.00±0.05	8.00±0.20	0.42±0.07
AL0402	0.65±0.10	1.15±0.10	1.50± ^{0.1} _{0.0}	3.50±0.05	4.00±0.10	2.00±0.10	2.00±0.05	8.00±0.20	0.42±0.07
AL0603	1.10±0.10	1.90±0.10	1.50± ^{0.1} _{0.0}	3.50±0.05	4.00±0.10	4.00±0.10	2.00±0.05	8.00±0.20	0.60±0.07
AL0805	1.65±0.20	2.40±0.20	1.50± ^{0.1} _{0.0}	3.50±0.05	4.00±0.10	4.00±0.10	2.00±0.05	8.00±0.20	0.75±0.07
AL1206	2.00±0.20	3.60±0.20	1.50± ^{0.1} _{0.0}	3.50±0.05	4.00±0.10	4.00±0.10	2.00±0.05	8.00±0.20	0.75±0.07
AL1210	2.80±0.20	3.50±0.20	1.50± ^{0.1} _{0.0}	3.50±0.05	4.00±0.10	4.00±0.10	2.00±0.05	8.00±0.20	0.75±0.07
AL2010	2.90±0.10	5.30±0.10	1.50± ^{0.1} _{0.0}	5.50±0.05	4.00±0.10	4.00±0.10	2.00±0.05	12.0±0.10	1.0±0.07
AL2512	3.40±0.10	6.60±0.10	1.50± ^{0.1} _{0.0}	5.50±0.05	4.00±0.10	4.00±0.10	2.00±0.05	12.0±0.10	1.0±0.07

11. 上胶带剥离力测试 (Peel force of top cover tape)

上胶带以 300mm/分钟的速度，沿 165~180 度角的方向进行剥离，如下图所示。纸带的剥离力范围为 10g~70g；载带的剥离力范围为 15~80g


The top cover tape is pulled at a speed of 300mm/min with the angle between the tape during peel and the direction of unreeling maintained at 165 to 180 degree as following picture. The peel force of paper carrier tape shall be 0.1N to 0.7N(10 to 70 g), the peel force of plastic carrier tape shall be 0.15N to 0.80N (15 to 80 g)

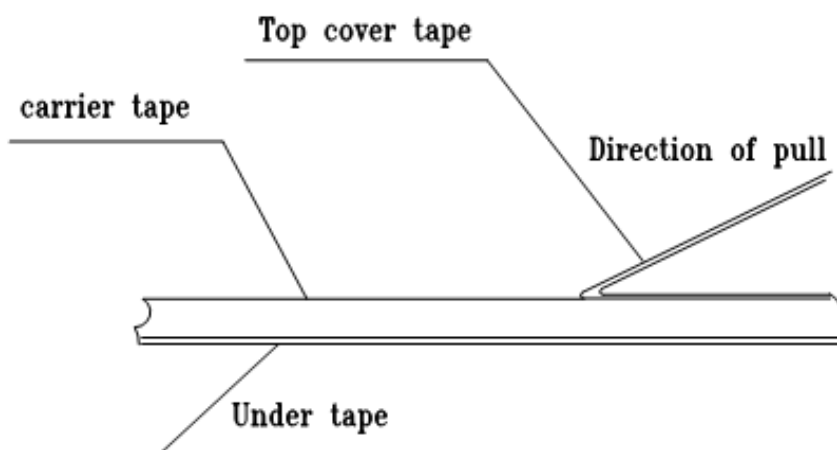

抗硫化厚膜贴片电阻规格书- AL 系列

Approval Specification for Anti- Sulfur Thick Film Chip Resistors-Type **AL**


12. 焊盘尺寸(Recommended land patterns):

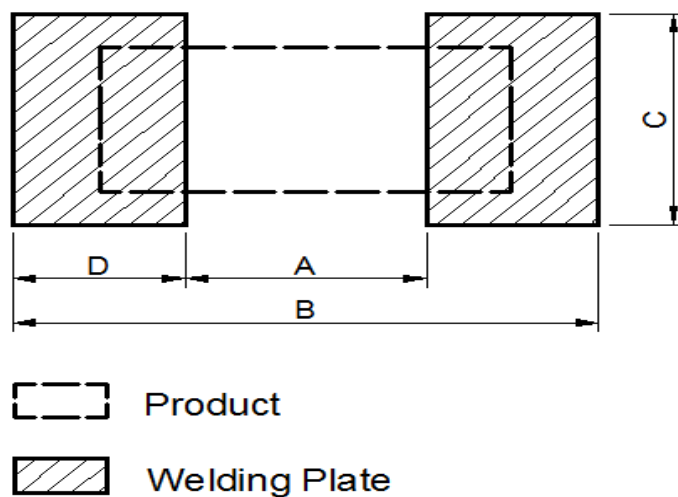


Type	Land pattern	Dimensions (mm)			
		A	B	C	D
	AL0201	0.25~0.30	0.70~0.90	0.30~0.40	0.23~0.28
	AL0402	0.50~0.60	1.40~1.60	0.40~0.60	0.42~0.52
	AL0603	0.70~0.90	2.00~2.20	0.80~1.00	0.60~0.70
	AL0805	1.00~1.40	3.20~3.80	0.90~1.40	1.10~1.20
	AL1206	2.00~2.40	4.40~5.00	1.20~1.80	1.15~1.35
	AL1210	2.00~2.40	4.40~5.00	2.30~3.50	1.15~1.35
	AL2010	3.30~3.70	5.70~6.50	2.30~3.50	1.20~1.40
	AL2512	3.60~4.00	7.60~8.60	2.30~3.50	2.05~2.25

13. 焊接 (soldering)

13.1 建议回流焊曲线 (Recommend reflow soldering profile)

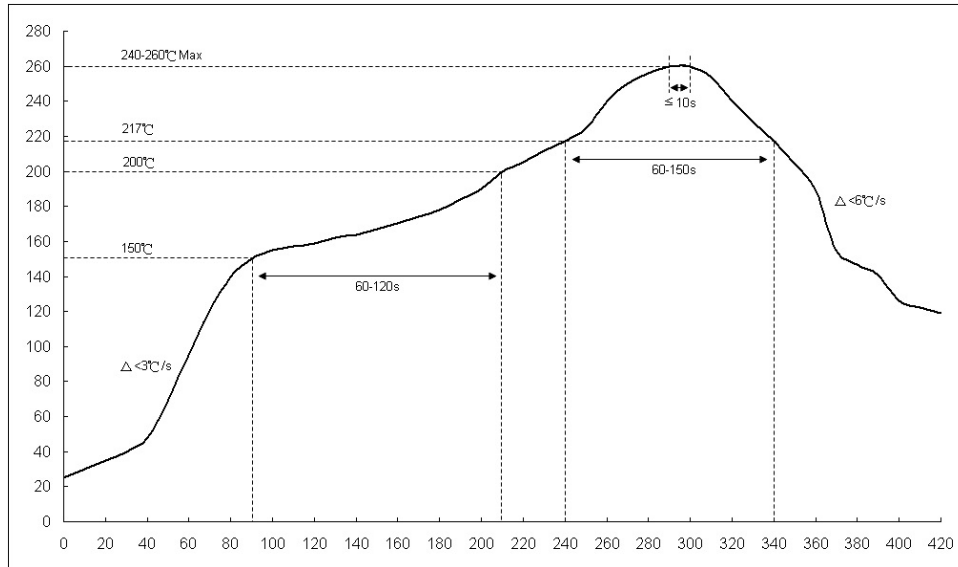

13.2 建议波峰焊曲线 (Recommend wave soldering profile)

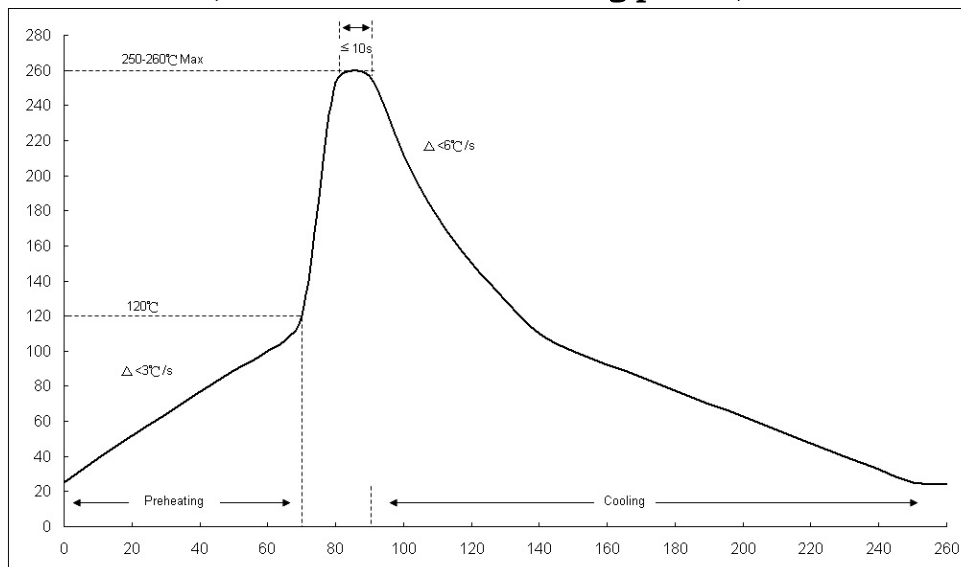

13.3 手工焊温度 (hand soldering temperature)

烙鐵溫度 $350 \pm 10^{\circ}\text{C}$ 3 秒之內，避免烙鐵接觸電阻本體

The iron temperature is $350 \pm 10^{\circ}\text{C}$, hand soldering time less than 3S. Avoid solder iron tip direct touch the components body.

产品规格及资料如有更改，恕不另行通知。

All product specification and data are subject to change without notice.