


Zener Diodes

CDZ55C-S Series

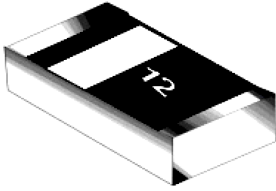

FEATURES


- Silicon planar power zener diodes
- SMD chip pattern, available in various dimension included 1206(CDZ55C series) & 0603(CDZ55C-T series)
- Leadfree and RoHS compliance components

MECHANICAL CHARACTERISTICS

- Size: 0805
- Weight: approx. 6mg
- Marking: Zener voltage & cathode terminal

DIMENSIONS

Dimension/mm	0805
L	2.0±0.2
W	1.25±0.2
T	0.75±0.1
C	0.45±0.2

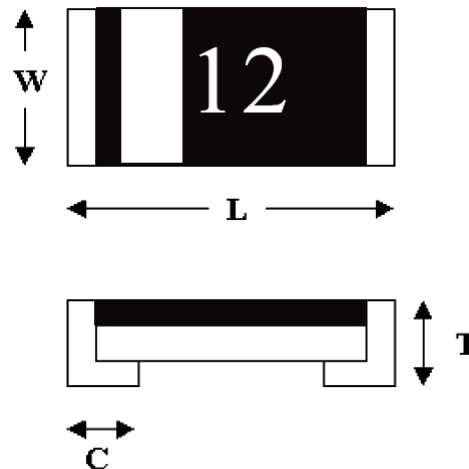

MAXIMUM RATING & THERMAL CHARACTERISTICS¹⁾

Parameter at $T_{amb}=25^{\circ}C^{1)}$	Symbol	Value	Unit
Power Dissipation	P_{tot}	500	mW
Repetitive Peak Forward Current	I_{FRM}	200	mA
Junction Temperature	T_j	150	$^{\circ}C$
Thermal Resistance Junction to Ambient air	$R_{\theta JA}$	300	$^{\circ}C/W$
Operating & Storage Temperature range	$T_{opr, stg}$	-55 to 150	$^{\circ}C$

1) Valid provided that electrodes are kept at ambient temperature.

ELECTRICAL CHARACTERISTICS¹⁾

Parameter at $T_{amb}=25^{\circ}C^{1)}$	Symbol	Value	Unit
Forward Voltage at $I_F=200mA$	V_F	1.5 <small>MAX</small>	V
Zener Voltage Tolerance, $C=\pm 5\%$			

1) Valid provided that electrodes are kept at ambient temperature.

Part Number	Marking Code	Nominal Zener Voltage		Max Zener Impedance				Max Reverse Leakage Current	
		$V_Z @ I_{ZT}$		$Z_{ZT} @ I_{ZT}$		$Z_{ZK} @ I_{ZK}$		$I_R @ V_R$	
		Min V	Max V	Ω	mA	Ω	mA	μA	V
CDZ55C2V0S	2	1.90	2.10	85	5	600	1	100	1
CDZ55C2V2S	2V2	2.09	2.31	85	5	600	1	75	1
CDZ55C2V4S	2V4	2.28	2.52	85	5	600	1	50	1
CDZ55C2V7S	2V7	2.57	2.84	85	5	600	1	10	1
CDZ55C3V0S	3	2.85	3.15	85	5	600	1	4	1
CDZ55C3V3S	3V3	3.14	3.47	85	5	600	1	2	1
CDZ55C3V6S	3V6	3.42	3.78	85	5	600	1	2	1
CDZ55C3V9S	3V9	3.71	4.10	85	5	600	1	2	1
CDZ55C4V3S	4V3	4.09	4.52	80	5	600	1	1	1
CDZ55C4V7S	4V7	4.47	4.94	70	5	600	1	0.5	1
CDZ55C5V1S	5V1	4.85	5.36	50	5	550	1	0.1	1
CDZ55C5V6S	5V6	5.32	5.88	30	5	450	1	0.1	1
CDZ55C6V2S	6V2	5.89	6.51	10	5	200	1	0.1	2
CDZ55C6V8S	6V8	6.46	7.14	8	5	150	1	0.1	3
CDZ55C7V5S	7V5	7.13	7.88	7	5	50	1	0.1	5
CDZ55C8V2S	8V2	7.79	8.61	7	5	50	1	0.1	6.2
CDZ55C9V1S	9V1	8.65	9.56	10	5	50	1	0.1	6.8
CDZ55C10S	10	9.50	10.50	15	5	70	1	0.1	7.5
CDZ55C11S	11	10.45	11.55	20	5	70	1	0.1	8.2
CDZ55C12S	12	11.40	12.60	20	5	90	1	0.1	9.1
CDZ55C13S	13	12.35	13.65	26	5	110	1	0.1	10
CDZ55C15S	15	14.25	15.75	30	5	110	1	0.1	11
CDZ55C16S	16	15.20	16.80	40	5	170	1	0.1	12
CDZ55C18S	18	17.10	18.90	50	5	170	1	0.1	13
CDZ55C20S	20	19.00	21.00	55	5	220	1	0.1	15
CDZ55C22S	22	20.90	23.10	55	5	220	1	0.1	16
CDZ55C24S	24	22.80	25.20	80	5	220	1	0.1	18
CDZ55C27S	27	25.65	28.35	80	5	220	1	0.1	20
CDZ55C30S	30	28.50	31.50	80	5	220	1	0.1	22
CDZ55C33S	33	31.35	34.65	80	5	220	1	0.1	24
CDZ55C36S	36	34.20	37.80	80	5	220	1	0.1	27
CDZ55C39S	39	37.05	40.95	90	2.5	500	0.5	0.1	29.3
CDZ55C43S	43	40.85	45.15	90	2.5	600	0.5	0.1	32.3
CDZ55C47S	47	44.65	49.35	110	2.5	700	0.5	0.1	35.3
CDZ55C51S	51	48.45	53.55	125	2.5	700	0.5	0.1	38.3
CDZ55C56S	56	53.20	58.80	135	2.5	1000	0.5	0.1	42

CDZ55C62S	62	58.90	65.10	150	2.5	1000	0.5	0.1	46.5
CDZ55C68S	68	64.60	71.40	200	2.5	1000	0.5	0.1	51
CDZ55C75S	75	71.25	78.75	250	2.5	1500	0.5	0.1	56.3

TYPICAL CHARACTERISTICS

Figure 1. Forward current vs Forward Voltage

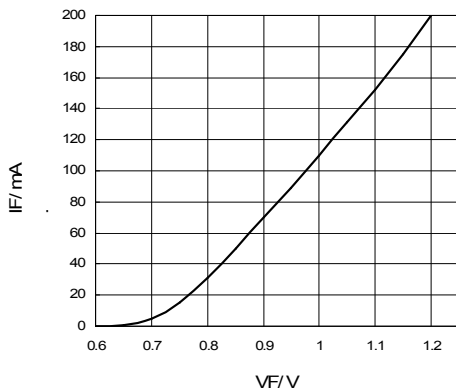
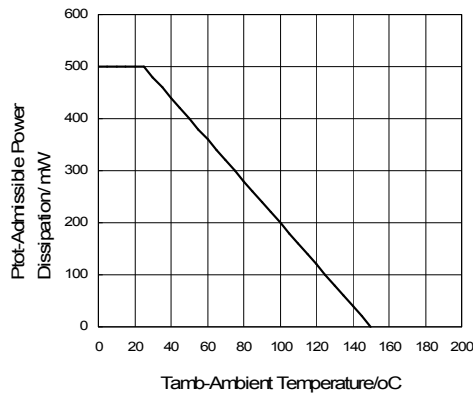


Figure 2. Power De-rating


TEST CHARACTERISTICS

Test Item	Test Condition	Requirement
Solderability	Sn bath at 245±5°C for 2±0.5s	>95% area tin covered
Resistance to Soldering Heat	Sn bath at 260±5°C for 10±2s	V_Z, Z_{ZT}, Z_{ZK}, I_R & V_F within spec; no mechanical damage
Humidity Steady State	At 85°C 85%RH for 168hrs	V_Z, Z_{ZT}, Z_{ZK}, I_R & V_F within spec
Continue Forward Operating Life	At 25°C $I_F = 1.1I_{Fmax}$ for 1000hrs	V_Z, Z_{ZT}, Z_{ZK}, I_R & V_F within spec
Thermal Shock	-55 ±5°C/5min to 150±5°C/5min for 10cycles	V_Z, Z_{ZT}, Z_{ZK}, I_R & V_F within spec
Bending Strength	Bending up to 2mm for 1cycle	V_Z, Z_{ZT}, Z_{ZK}, I_R & V_F within spec; no mechanical damage

APPLICATIONS

- Function: constant voltage control
- Soldering Condition:

Soldering Condition & Caution

- Recommended Soldering Condition
(Refer to IPC/JEDEC J-STD-020D 4-1&5.2)

Recommended Profile Condition	Sn-Pb Soldering	Leadfree Soldering	Wave Soldering
Ramp-up rate (from pre-heat stage)	<3°C/s	<3°C/s	$\Delta T < 150^\circ\text{C}$
Pre-heat Temperature & Time	100-150 °C 60-120s	150-200 °C 60-120s	100-150 °C 60-120s
Soldering Temperature & Time	183 °C 60-150s	217 °C 60-150s	260±5°C 5±2s
Peak Temperature	230±5°C <260°C	245±5°C <260°C	260±5°C
Time within 5°C of peak temperature	10-20s	20-30s	-
Ramp-down rate	<6°C/s	<6°C/s	<6°C/s
Time 25°C to peak temperature	<6min	<8min	-

Manual Soldering: Approx. 350°C for 3s, avoid solder iron tip direct touch the components body

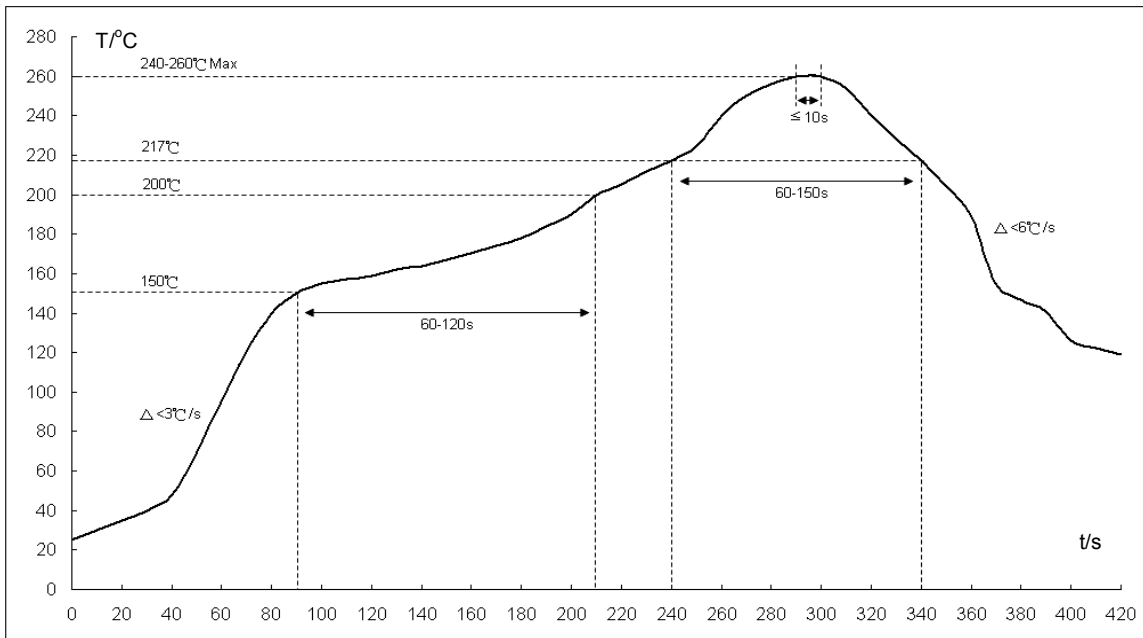
Recommended Soldering Profile


Fig1: Reflow soldering profile for lead-free solder (SnAgCu)


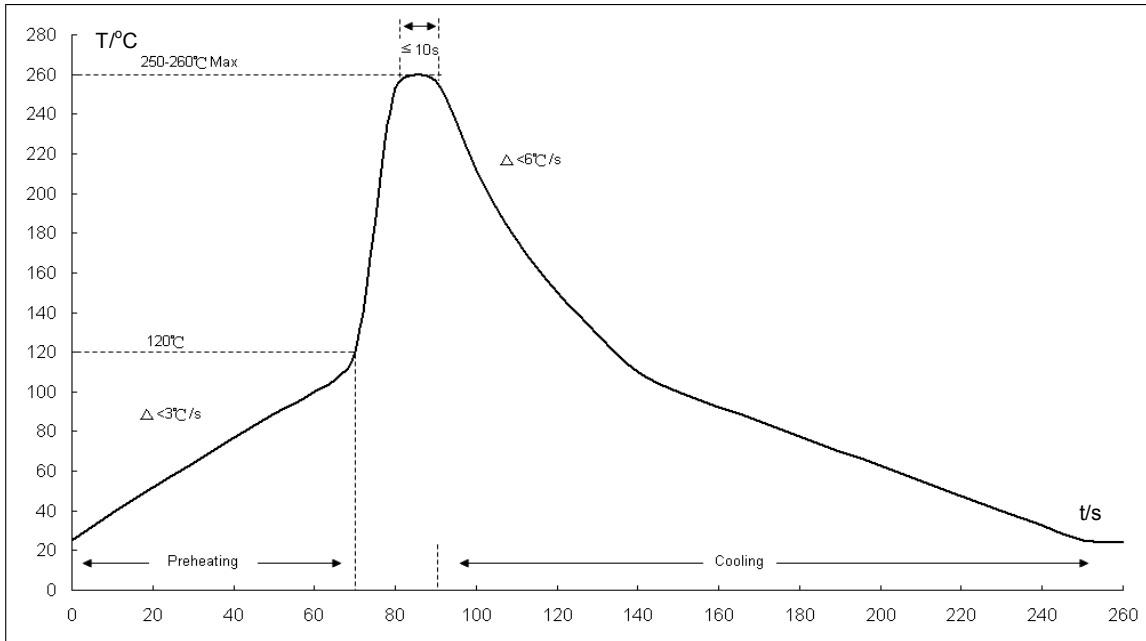


Fig2: Wave soldering profile

- *1. The recommended profiles are referring to IPC/JEDEC J-STD-020D & IEC-60068-2-58
- *2. Chip diodes are able to stand maximum soldering temperature up to 260°C max for 10s, and the soldering cycles with max 3 times, referring to IEC-60068-2-58

■ Recommended Soldering Footprint:

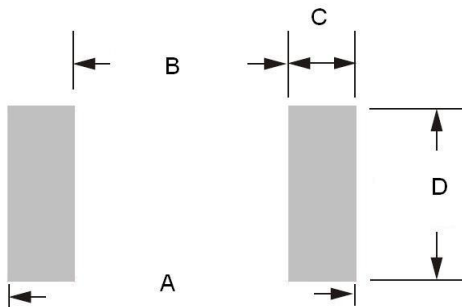

■ Reflow/Wave Soldering				
Product Size	Dimension/ mm			
	A	B	C	D
0805	2.6-3.4	1.2	0.7-1.1	1.2-1.4

- Storage Condition: Product termination solderability can degrade due to high temperature and humidity or chemical environment. Storage condition must be in an ambient temperature of <40°C and ambient humidity of <75%RH, and free from chemical.

ENVIRONMENTAL CHARACTERISTICS

Product	Hazardous Substance or Element/ppm					
	Pb	Cd	Hg	Cr ⁶⁺	PBB	PBDE
	<1000	<100	<1000	<1000	<1000	<1000

Product	Halogen Substance/ ppm				
	F	Cl	Br	I	Total
	<900	<900	<900	<900	<1500

PACKING METHOD

Product	Quality/Reel	Reel Size	Tape
	5,000pcs	7"	Paper

DISCLAIMERS

These products are not designed for use in applications where any failure or malfunction may result in personal injury, death or severe property or environmental damage such as medical, military, aircraft, space or life support equipments.