




ESDQR5V0BX

5V Bi-directional ESD

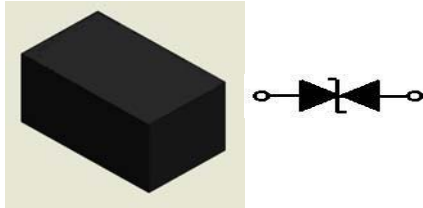


Features

- Meet IEC61000-4-2 (ESD)±15kV (air) ±8kV (contact)
- Meet IEC61000-4-5 (Lightning) rating. 2A (8/20μs)
- Protects one bi-directional I/O line
- Working Voltage : 5V
- Pb free version, RoHS compliant, and Halogen free

Mechanical Characteristics

- Case: DFN1006(0402) standard package
- Terminals: Sn / Au plated, solderable per MIL-STD-750, method 2026
- Marking Code: S
- Mounting position: Any.
- Weight: 0.001 gram(approx.)
- MSL: Level 1

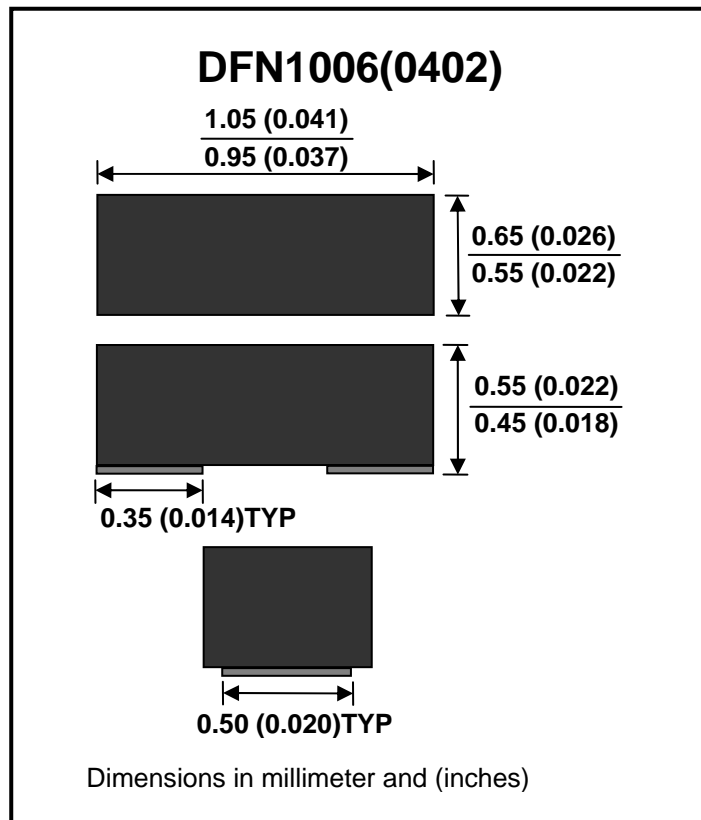

Maximum Rating And Electrical Characteristics (at Ta=25°C unless otherwise noted)

Parameter	Condition	Symbol	Min	Typ	Max	Unit
Peak Pulse Power	tp=8/20 μs (According to IEC61000-4-5)	Ppp			30	W
Maximum Peak Pulse Current	tp=8/20 μs (According to IEC61000-4-5)	Ipp		2		A
ESD per IEC 61000-4-2 (Air)		VESD			±15	kV
ESD per IEC 61000-4-2 (Contact)					±8	kV
Operating Junction Temperature		Tj	-55		125	°C
Storage Temperature		Tstg	-55		150	°C
Reverse Stand-Off Voltage		VRWM			5	V
Reverse Breakdown Voltage	It = 1mA	VBR			9.0	V
Reverse Leakage Current	VRWM = 5V	IR			50	nA
Clamping Voltage	Ipp = 1A · tp = 8/20 μs	Vc			14	V
Junction Capacitance	Between I/O Pin and GND VR=0V · f=1MHz	Cj		0.2	0.3	pF



Typical Characteristics

Fig.1 - 8/20us Peak Pulse Current Wave Form Acc. IEC 61000-4-5

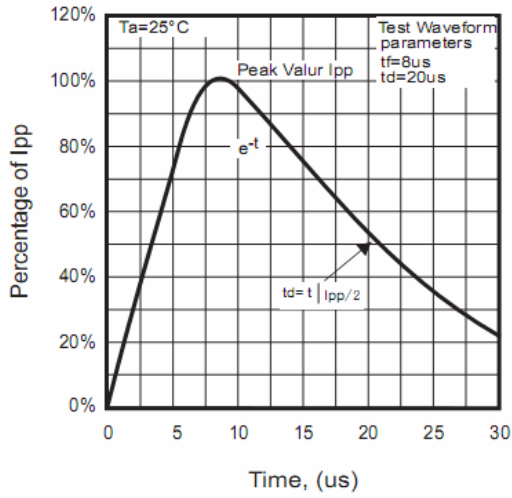


Fig.2 - Typical Capacitance Between Terminals Characteristics

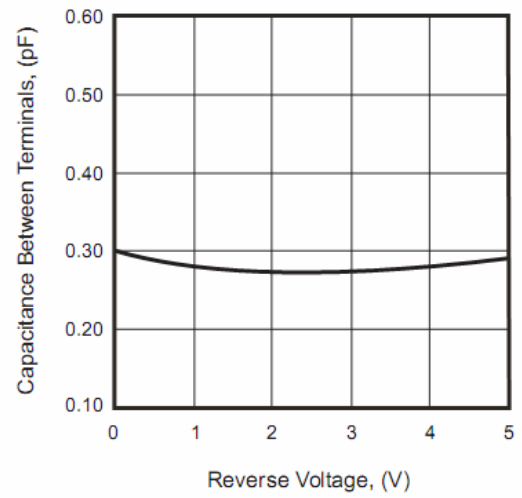


Fig.3 - Clamping Voltage Vs. Peak Pulse Current

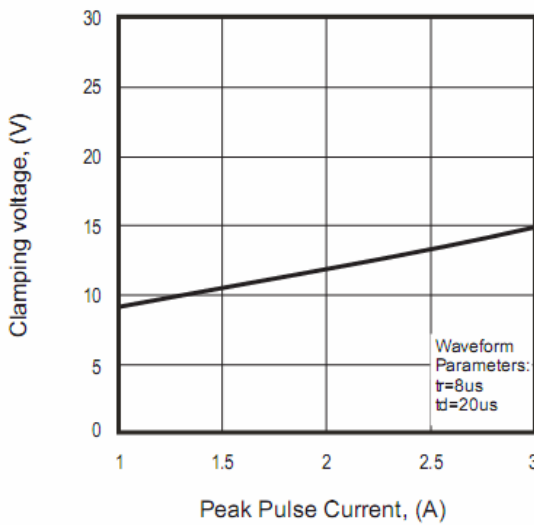


Fig.4 - TLP Measurement

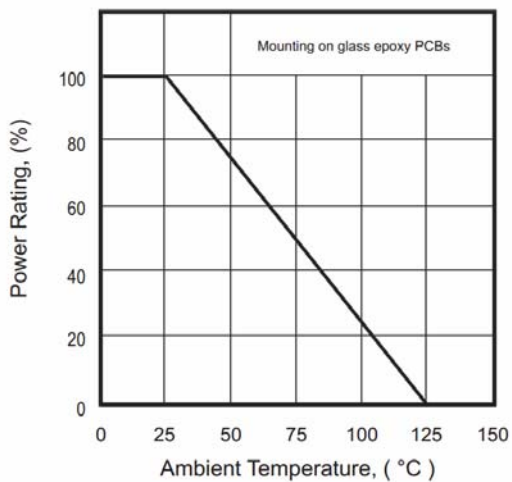
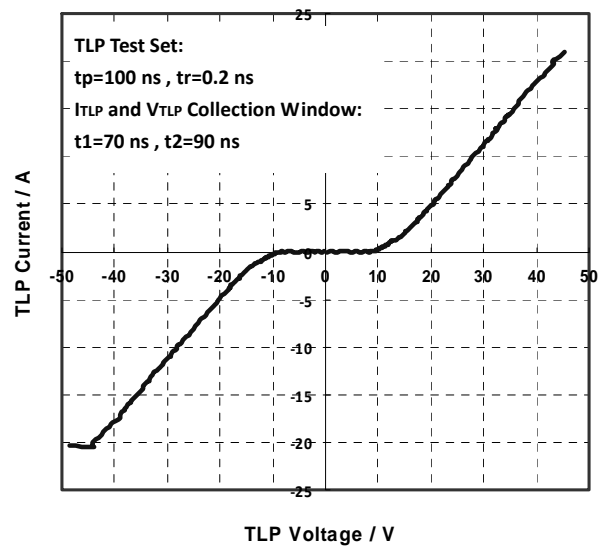




Fig. 5 Unclamped -8 kV ESD pulse waveform (IEC 61000-4-5 network)

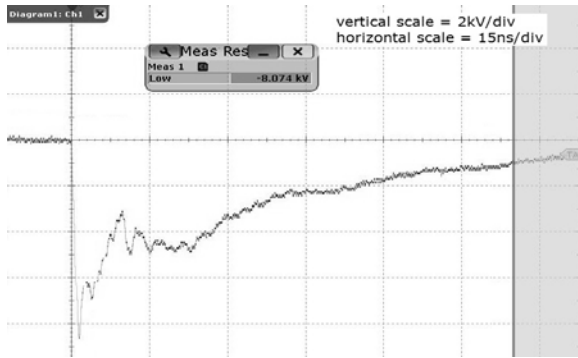


Fig. 6 Unclamped +8 kV ESD pulse waveform (IEC 61000-4-5 network)

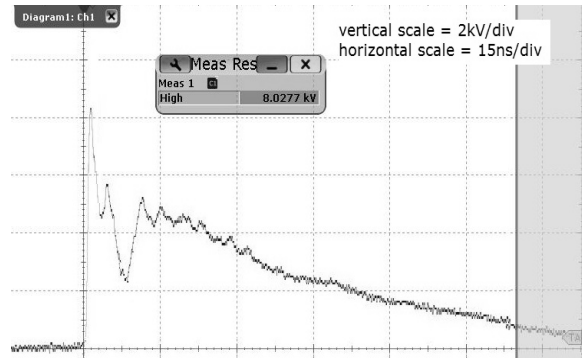


Fig. 7 Clamped -8 kV ESD pulse waveform (IEC 61000-4-5 network)


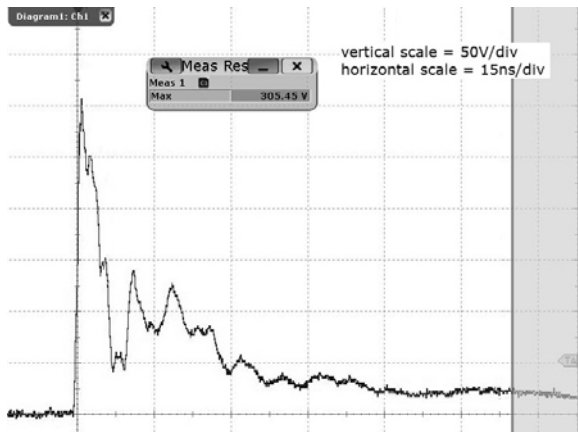



Fig. 8 Clamped +8 kV ESD pulse waveform (IEC 61000-4-5 network)



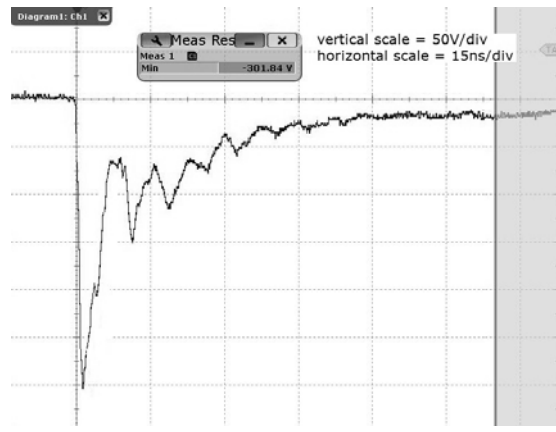

ESD Diode

Packing Specification

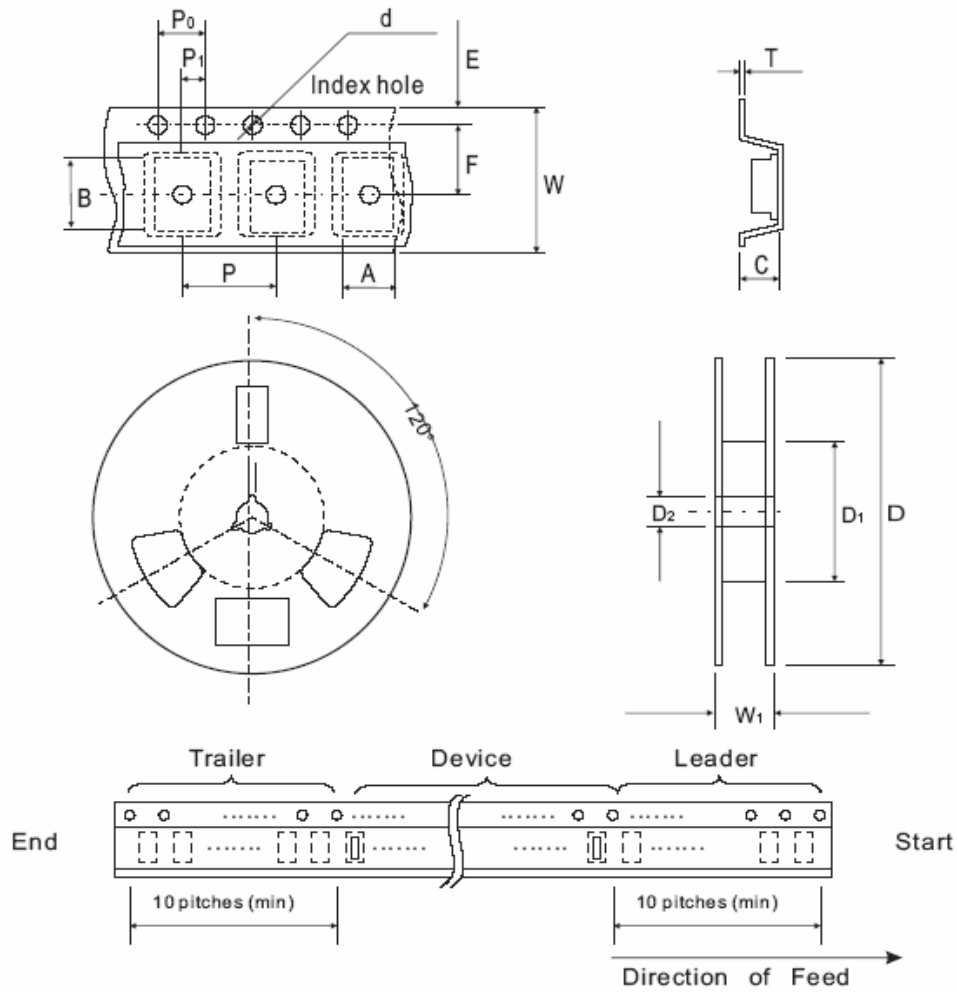

Tape & Reel Dimensions


Package	Unit	A	B	C	d	D
DFN1006	mm	0.67±0.10	1.12±0.10	0.60±0.10	1.50±0.10	178±1
	inch	0.026±0.004	0.044±0.004	0.024±0.004	0.060±0.004	7.008±0.04

Package	Unit	D1	D2	E	F	P
DFN1006	mm	60MIN	13.0±0.20	1.75±0.10	3.5±0.10	2.0±0.10
	inch	2.362MIN	0.512±0.008	0.069±0.004	0.138±0.004	0.079±0.004

Package	Unit	P0	P1	T	W	W1
DFN1006	mm	4.0±0.10	2.0±0.10	0.22±0.03	8.0±0.10	10.5±0.5
	inch	0.157±0.004	0.079±0.004	0.009±0.002	0.315±0.004	0.413±0.02

**Standard Package**

Package	Reel Size	Qty/Reel
DFN1006	7"	10,000 pcs

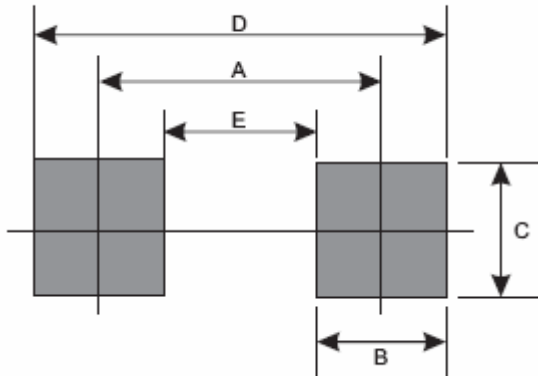Recommended Soldering Footprint**Reflow Soldering**

Product Size	Dimension/ mm				
	A	B	C	D	E
DFN1006	0.750	0.500	0.700	1.250	0.250
	0.030"	0.020"	0.028"	0.049"	0.010"

Marking Code

Part Number	Marking Code
ESDQR5V0BX	S

**Disclaimers**

These products are not designed for use in applications where any failure or malfunction may result in personal injury, death or severe property or environmental damage such as medical, military, aircraft, space or life support equipments.